



**Applications:-**

Shops, Entrance, Clinics, School, Homes, Hallways, Hospital, Corridors, etc...

**Specifications:-**

- Surface mounted.
- Reflector: Polished/Matt Reflector.
- Housing: Aluminum.
- Heat Sink: Die cast aluminum.
- Life Time: 50,000HRS.
- LED: High Power LEDs on Metal Core PCB.
- **Options:**
- Color: White, Black, Sliver Sand.
- Dimming: 1-10 standard dimming.
- Suitable for emergency battery backup for 3hrs.


**LIGHTING SOURCE**

MODEL	SIZE	LUMEN	EFFICACY	WATTAGE	VOLTAGE	CCT	CRI	BEAM ANGEL
NLC L 42	Ø76MM x155MM	700LM	78LM/W	9W	100-240V 50/60Hz	3000K	>80	60°
	Ø113MM x 155MM	1150LM	77LM/W	15W		4000K		
	Ø150MM x 225MM	2000LM	77LM/W	26W		5000K		


IP 54

CE

**DRAWING**

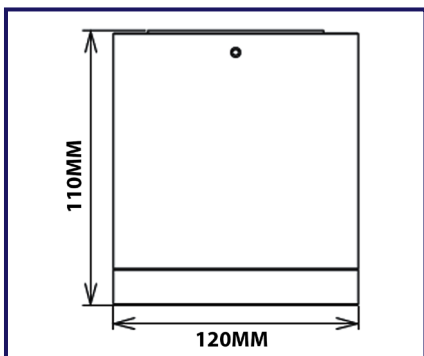

**PHOTOMETRIC DATA**

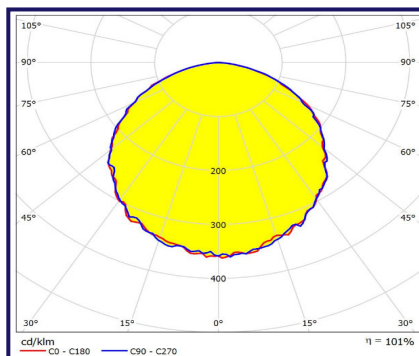

**CFL - LED**

1X18W	9W
2X18W	15W
2X26W	26W