


Applications:-

Offices, Shops, Clinics, School, Homes, Hallways, Hospital, Corridors, etc...

Specifications:-

- Recessed mounted.
- Luminaire body of steel sheet, degreased, phosphated and electrostatically coated, stoved enamelled in white epoxy polyester powder paint.
- LED opal diffuser.
- Life Time: 50,000HRS.
- **Options:**
- Tuneable CCT with remote control from 2700-6500K.
- Suitable for emergency battery backup for 3hrs.
- Dimming: 1-10 standard dimming.
- Surface mounted available upon request.
- IP 44 and IP 65 available upon request.

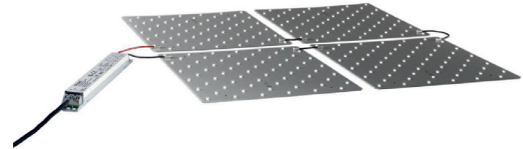



LIGHTING SOURCE

MODEL	SIZE	OPERATING MODE	LUMEN	EFFICACY	WATTAGE	VOLTAGE	CCT	CRI	BEAM ANGEL
NLC L 50	300 X 1200MM 1' X 4'	250mA	3900LM	126LM/W	31W	220-240V/50/60Hz	3000K	>80	120°
			4100LM	132LM/W			4000K		
			4300LM	139LM/W			5000K		
		300mA	4450LM	117LM/W	38W		3000K		
			4750LM	125LM/W			4000K		
			5050LM	133LM/W			5000K		
	600 X 600MM 2' X 2'	250mA	3900LM	126LM/W	31W		3000K		
			4100LM	132LM/W			4000K		
			4300LM	139LM/W			5000K		
		300mA	4450LM	117LM/W	38W		3000K		
			4750LM	125LM/W			4000K		
			5050LM	133LM/W			5000K		
	600 X 1200MM 2' X 4'	250mA	7800LM	126LM/W	62W		3000K		
			8200LM	132LM/W			4000K		
			8600LM	139LM/W			5000K		
		300mA	8900LM	117LM/W	76W		3000K		
			9500LM	125LM/W			4000K		
			10100LM	133LM/W			5000K		

DRAWING

PHOTOMETRIC DATA

T8,T5 - LED

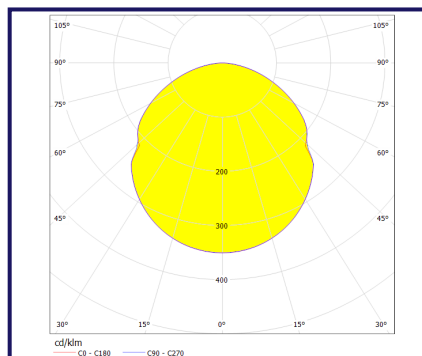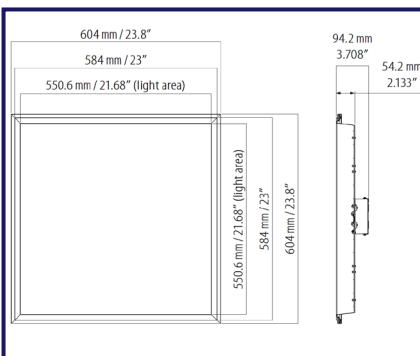

4 X 18W	31W
4 X 14W	38W
4 X 36W	62W
4 X 28W	72W

