



Applications:-

Offices, Shops, Clinics, School, Homes, Hallways, Hospital, Corridors, etc...


Specifications:-

- Recessed troffer flat lighting luminaires designed for low profile drop ceiling grid, reducing height restrictive applications.
- Ideal for standard commercial ceiling grids; typically used to replace standard 60X60 / 60X120 fluorescent fixture.
- Using edge-lit technology, flat Light luminaire dramatically reduces eye fatigue due to its glare resistant film providing uniform luminance.
- LM-79, LM-80.
- Aluminum housing.
- Life Time: 50,000HRS.
- **Options:**
- M-bar, T-Bar, Clip-Bar, Surface Mounted, Pendant mounted Available.
- Suitable for emergency battery backup for 3hrs.
- Dimming: 1-10 standard dimming.


LIGHTING SOURCE

MODEL	SIZE	LUMEN	EFFICACY	WATTAGE	VOLTAGE	CCT	CRI	BEAM ANGEL
NLC L 51	300 X 1200MM 1' X 4'	2800LM	88LM/W	32W	120-277V/50/60Hz	3000K	>80	120°
		3000LM	93LM/W			4000K		
		3200LM	100LM/W			5000K		
	600 X 600MM 2' X 2'	3600LM	90LM/W	40W		3000K		
		3800LM	95LM/W			4000K		
		4000LM	100LM/W			5000K		
	600 X 1200MM 2' X 4'	4560LM	95LM/W	48W		3000K		
		5100LM	106LM/W			4000K		
		5300LM	110LM/W			5000K		
		6000LM	100LM/W	60W		3000K		
						4000K		
						5000K		

DRAWING

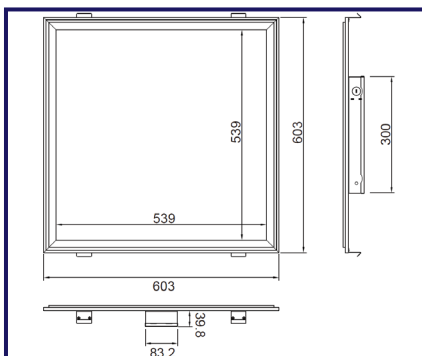

PHOTOMETRIC DATA

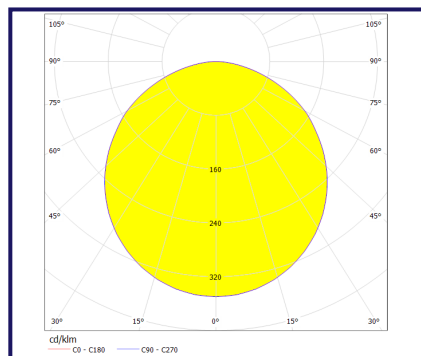

T8,T5 - LED

4 X 18W	32W
4 X 14W	40W
4 X 36W	48W
4 X 28W	60W

