



**Applications:-**

Offices, Shops, Clinics, School, Homes, Hallways, Hospital, Corridors, etc...

**Specification:-**


- Recessed / Surface / Suspended mounted.
- Low profile edge-lite LED panel.
- High quality aluminum, performs well in cooling.
- High quality PMMA light guide for improved uniformity.
- Glare less optical technology to control the glare (UGR <19).
- Supply easy connector for connect remote constant current control driver.
- Life Time: 30,000 up to 50,000HRS.
- **Options:**
- Suitable for emergency battery backup for 3hrs.
- Dimming: 1-10 standard dimming.
- IP 65 for 600X600MM upon request.
- Tuneable CCT with remote control from (2700-6500K).

**LIGHTING SOURCE**


MODEL	SIZE	LUMEN	EFFICACY	WATTAGE	VOLTAGE	CCT	CRI	BEAM ANGEL	
NLC L 52	300 X 1200 X 11MM	3300LM	87LM/W	38W	100-240V 50/60Hz	3000K	>80	120°	
		3500LM	92LM/W			4000K			
		3650LM	95LM/W			5000K			
	600 X 600 X 11MM	2650LM	100LM/W	26W		3000K			
		3000LM	115LM/W			4000K			
		3100LM	120LM/W			5000K			
		600 X 1200 X 11MM	3300LM	87LM/W		38W			3000K
			3500LM	92LM/W					4000K
			3650LM	95LM/W					5000K
	600 X 1200 X 11MM		6400LM	89LM/W		72W			3000K
			6900LM	95LM/W					4000K
			7150LM	100LM/W					5000K



**DRAWING**

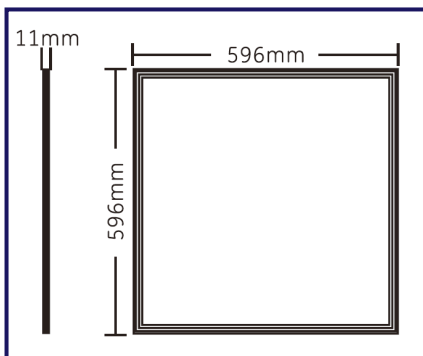

**PHOTOMETRIC DATA**

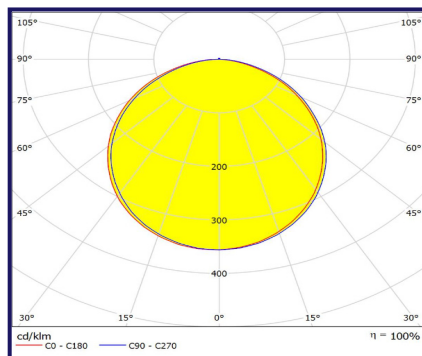

**T8, T5 - LED**

4 X 18W	26W
4 X 14W	38W
4 X 36W	72W
4 X 28W	