




OMEGA

Contemporary Light With a Natural Soul



IP54



IK02



3 Years WARRANTY
Extended to 5 Years



Wall Mounted Luminaire

Crafted from durable aluminum with a refined powder-coated frame, it offers exceptional resistance to weather and corrosion while maintaining a premium aesthetic. The wood-textured panel adds a natural character that softens the rigidity of modern structures, creating harmony between light, form, and material.



• APPLICATION

 Business Campuses

 Recreational Areas

 Mall/retail Areas


 Building Exteriors

 Educational Facilities

 Perimeter Areas

• CHARACTERISTICS & SPECIFICATIONS TABLE

• Technical Parameters

Input Voltage:	100-240VAC 50/60Hz
Power Factor:	>0.95
THD:	<15
Surge protection options (kV):	1KV (L-N), 2KV (L/N-PE)
Working Temp (ta):	-20°C~+55°C
Operating Humidity:	10-85% RH
Protection Class :	Class I 
Color Temperature :	

• Features

Housing :	Die-Cast Aluminum
Mounting:	Wall Mounted
Optics:	Glass
Body Finish:	Electrostatic Polyester Powder-Coated
Body Color:	Available Colors: Dark Grey / Silver / White / Black / Rust
Lifetime :	L70B50 > 50,000h L80B20 > 30,000h
LED Type:	SMD3030
Dimming:	Optional
Switching Cycles:	>25,000

- **Performance**


Model	Power	Efficiency	System Lumen	Beam Angle	CRI
NLC-OM	10.5W	83.6LM/W 71.9LM/W	719/836LM	83°/ 90°	Standard: >80 Optional: >90

*Above values are calculated based on the product with CCT 3000K


*Values shown are subject to ±10% tolerance

- **Drawing**

L140 x W140 x D94mm



- **LIGHT DISTRIBUTIONS CURVE**

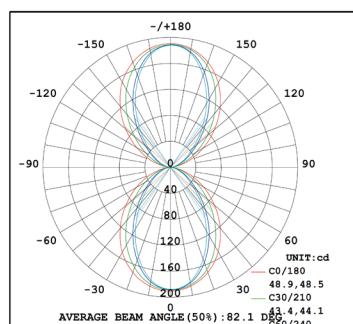

- **Certificates**



Street 77, 2nd Industrial City
P.O. Box 353, Dammam-3141



Tel: +966-(013) 812-2020
Fax: +966-(013) 812-2250



info@nlc.com.sa
www.nlc.com.sa