

OCEAN

UP TO 120 lm/w
Clean Lines, Perfect Light



IP20



Warranty



Linear design

A modern linear lighting solution that delivers uniform brightness and sleek aesthetics. Designed for versatile indoor use, it enhances every space with reliable performance and elegant simplicity.

• APPLICATION



Residential Areas



Galleries and Museums



Hospitality Spaces



Reception Areas



Retail Stores



Offices and Meeting Rooms

• CHARACTERISTICS & SPECIFICATIONS TABLE

Technical Parameters

Input:	220-240VAC 50/60 Hz
Power Factor:	>0.95
THD:	<15
Surge protection:	1 KV (L-N), 2KV(L-N-PE)
Working Temp (ta):	45°C
Electrical Class:	Class II 
Operating Humidity:	20-85% RH
Color Temperature :	

Features

Housing :	Steel
Mounting:	Surface Mounted / Hanging
Optics :	Polycarbonate
Body Finish:	Electrostatic Polyester Powder-Coated
Body Color:	Available Colors: White
Lifetime :	L70B50 > 100,000h / L80B20 > 50,000h
LED Type:	SMD2835
Emergency Backup:	Optional
Dimming:	Optional
Switching Cycles:	>50,000 Times
Flicker Free:	

• PERFORMANCE

Model	Power	Efficiency	Lumen	Beam Angle	CRI	Source
NLC-OC	20W 40W	120lm/W	2400lm 4800lm	100°	Standard: >80 Optional: >90	


*Above values are calculated based on the product with CCT 4000K

*Values shown are subject to ±10% tolerance


• DRAWING

Ensure IP20-rated sealing when connecting the cable

20W L619 x H54 x W135mm | 40W L1209 x H54 x W135mm

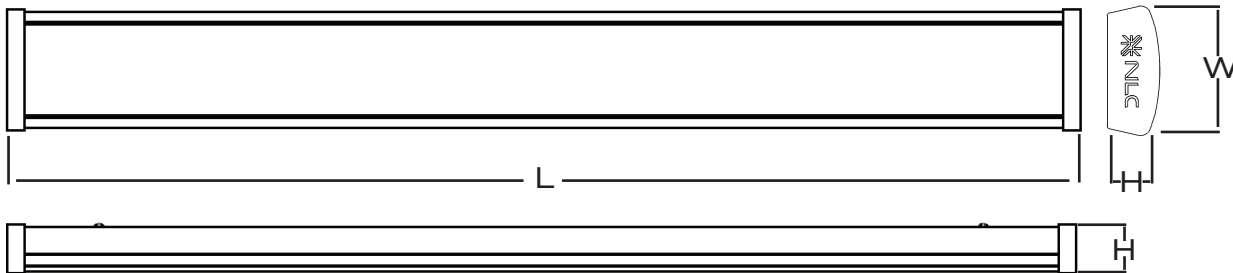

• LIGHT DISTRIBUTIONS CURVE

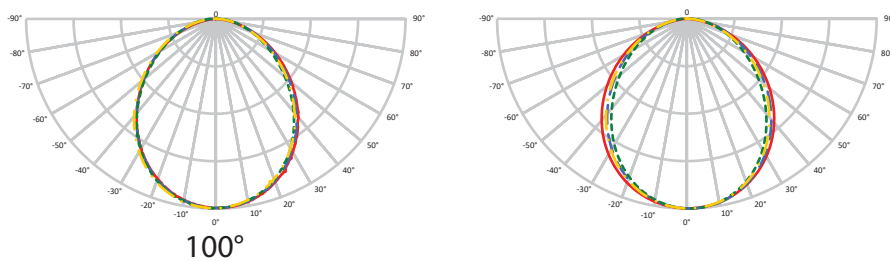

• CERTIFICATES



CB



RoHS



Street 77, Second Industrial City
P.O. Box 353, Dammam-3141



Tel: +966-(013) 812-2020
Fax: +966-(013) 812-2250



info@nlc.com.sa
www.nlc.com.sa