

BEAM

Sharp Lines, Smooth Illumination



IP54



IK06



3 Years WARRANTY
Extended to 5 Years



Wall Mounted Luminaire

Engineered from premium aluminum with a robust powder-coated finish, it is designed to endure outdoor conditions while retaining its sleek, professional aesthetic. The fixture's precision optics ensure consistent beam control and glare-free comfort, enhancing both visual appeal and functional efficiency.



• APPLICATION



Business Campuses



Recreational Areas



Mall/retail Areas



Building Exteriors



Educational Facilities



Perimeter Areas

• CHARACTERISTICS & SPECIFICATIONS TABLE

• Technical Parameters

Input Voltage:	100-240VAC 50/60Hz
Power Factor:	>0.95
THD:	<15
Surge protection options (kV):	1KV (L-N), 2KV (L/N-PE)
Working Temp (ta):	-20°C~+55°C
Operating Humidity:	10-85% RH
Protection Class :	Class I
Color Temperature :	

• Features

Housing :	Die-Cast Aluminum
Mounting:	Wall Mounted
Optics:	Glass
Body Finish:	Electrostatic Polyester Powder-Coated
Body Color:	Available Colors: Dark Grey / Silver / White / Black / Rust
Lifetime :	L70B50 > 50,000h L80B20 > 30,000h
LED Type:	SMD3030
Dimming:	Optional
Switching Cycles:	>25,000

• Performance


Model	Power	Efficiency	System Lumen	Beam Angle	CRI	Source
NLC-BM	15.5W	63LM/W	975LM	52°	Standard: >80 Optional: >90	CREE 

*Above values are calculated based on the product with CCT 3000K


*Values shown are subject to $\pm 10\%$ tolerance

• Drawing

L205 x W111 x H60mm



• LIGHT DISTRIBUTIONS CURVE

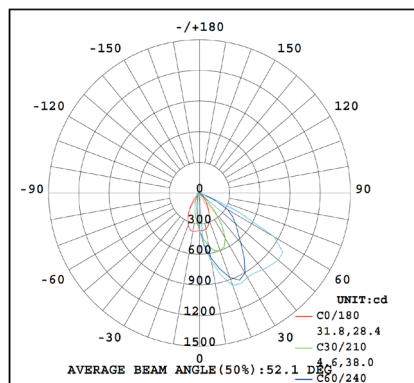

• Certificates

