

FRAME

Designed to Disappear,Built to Illuminate



IP65



IK06



3 Years WARRANTY
Extended to 5 Years



Wall Mounted Luminaire

Whether installed as a single accent or in a continuous lighting rhythm, it redefines subtlety, proving that sometimes, the most powerful designs are the quietest



• APPLICATION



Business Campuses



Recreational Areas



Mall/retail Areas



Building Exteriors



Educational Facilities



Perimeter Areas

• CHARACTERISTICS & SPECIFICATIONS TABLE

• Technical Parameters

Input Voltage:	100-240VAC 50/60Hz
Power Factor:	>0.95
THD:	<15
Surge protection options (kV):	1KV (L-N), 2KV (L/N-PE)
Working Temp (ta):	-20°C~+55°C
Operating Humidity:	10-85% RH
Protection Class :	Class I
Color Temperature :	2700K > 3000K > 4000K > 5000K > 5700K > 6500K R G B

• Features

Housing :	Die-Cast Aluminum
Mounting:	Wall Mounted
Optics:	PMMA
Body Finish:	Electrostatic Polyester Powder-Coated
Body Color:	Available Colors: Dark Grey / Black
Lifetime :	L70B50 > 50,000h L80B20 > 30,000h
LED Type:	SMD
Dimming:	Optional
Switching Cycles:	>25,000

• Performance


Model	Power	Efficiency	System Lumen	Beam Angle	CRI	Source
NLC-FR	3.8W	20LM/W	76LM	20°	Standard: >80 Optional: >90	CREE 

*Above values are calculated based on the product with CCT 3000K


*Values shown are subject to $\pm 10\%$ tolerance

• Drawing

L155 x W90 x H47mm

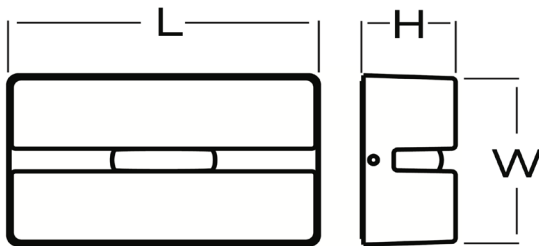

• LIGHT DISTRIBUTIONS CURVE

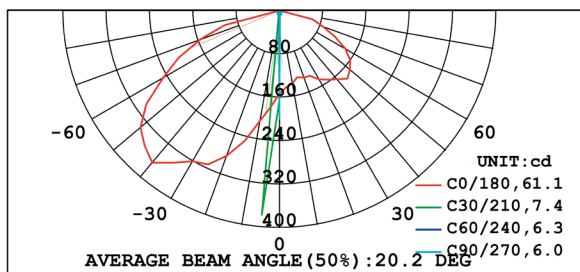

• Certificates

