

# MAGIC-T

UP TO 123 lm/w  
Streamlined Track Spotlight



Tilttable  
Head



Multiple  
Accessories



Low  
Uncomfortable  
Glare



3 separate  
Control Groups



To achieve the perfect light spot, the Magic series adopts the top quality lens as the optical accessory, uses with the integrated driver adapter and blackened bezel to reduce glare effectively. The Magic Series comes in  $\Phi 118$  size, with optical accessory choices.

#### • APPLICATION

 Residential Areas	 Galleries and Museums	 Hospitality Spaces
 Reception Areas	 Retail Stores	 Offices and Meeting Rooms

#### • CHARACTERISTICS & SPECIFICATIONS TABLE


##### Technical Parameters

Input:	220-240V-50/60Hz
Power Factor:	>0.95
THD:	<15
Surge protection options (kV)	1KV (L-N), 2KV (L/N-PE)
Working Temp (ta):	35°C
Color Temperature :	 2700K  > 3000K  > 4000K  5000K 

##### Features

Housing :	Aluminum / PC
Mounting:	Track Spotlight
Optics :	Polycarbonate
Body Finish:	Electrostatic polyester powder-coated
Body Color:	Available Colors: Black, Gray, white
Lifetime :	L70B50 > 50,000h
LED Type:	COB
Emergency Backup:	NA
Dimming:	Optional
Switching Cycles:	>25,000 times
Flicker Free:	

Beam Direction:




#### • PERFORMANCE

Model	Power	Efficiency	Lumen	Beam Angle	CRI	Source
NLC-MT	14W		1722 lm	17°		
	22W	123lm/W	2706 lm	24°	Standard:>90 Optional:>95	
	28W		3444 lm	32°		
				55°		

- **Drawing**

Φ118 x H67mm

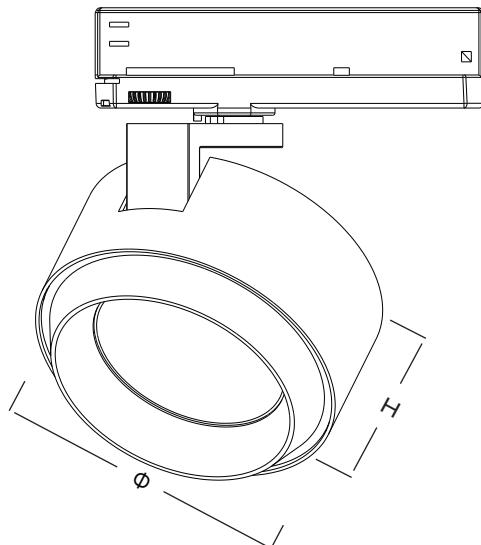

- **LIGHT ACCESSORIES**



Elliptic optical  
accessory



Honeycomb



Cross louver




Wall washer




Barndoors


- **LIGHT DISTRIBUTIONS Curve**




17°



24°



32°



55°

- **Certificates**



\*Above values are calculated based on the product with CCT 4000K

\*Values shown are subject to ±10% tolerance



Street 77, Second Industrial City  
P.O. Box 353, Dammam-3141



Tel: +966-(013) 812-2020  
Fax: +966-(013) 812-2250



info@nlc.com.sa  
www.nlc.com.sa