



# ALIEN

Sharp Lines, Smooth Illumination



IP65



IK06



3 Years WARRANTY  
Extended to 5 Years



## Bollard Luminaire

Engineered from premium aluminum with a robust powder-coated finish, it is designed to endure outdoor conditions while retaining its sleek, professional aesthetic. The fixture's precision optics ensure consistent beam control and glare-free comfort, enhancing both visual appeal and functional efficiency.



### • APPLICATION



Business Campuses



Recreational Areas



Mall/retail Areas



Building Exteriors



Educational Facilities



Perimeter Areas

### • CHARACTERISTICS & SPECIFICATIONS TABLE

#### • Technical Parameters

Input Voltage:	220-240VAC   50/60Hz
Power Factor:	>0.90
THD:	<15
Surge protection options (kV):	1kV (L-N), 2kV (L/N-PE)
Working Temp (ta):	-20°C~+55°C
Operating Humidity:	10-85% RH
Protection Class :	Class I
Color Temperature :	

#### • Features

Housing :	Aluminum
Mounting:	Bollard
Optics:	PMMA
Body Finish:	Electrostatic Polyester Powder-Coated
Body Color:	Available Colors: Dark Grey / Silver / White / Black / Rust
Lifetime :	L70B50 > 30,000h
LED Type:	COB
Dimming:	Optional
Switching Cycles:	>15,000

- **Performance**


Model	Power	Efficiency	System Lumen	Beam Angle	CRI	Source
NLC-AN	15W	46LM/W	690LM	28°	Standard: >80 Optional: >90	<b>CREE</b> 

\*Above values are calculated based on the product with CCT 3000K


\*Values shown are subject to ±10% tolerance

- **Drawing**

L161 x W55 x H250mm | L166 x W55 x H800mm | L166 x W55 x H1350mm

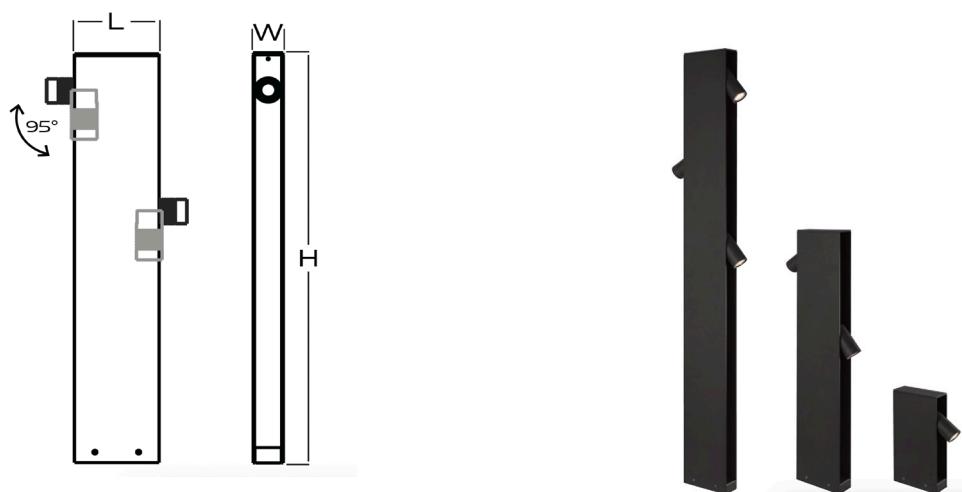

- **LIGHT DISTRIBUTIONS CURVE**

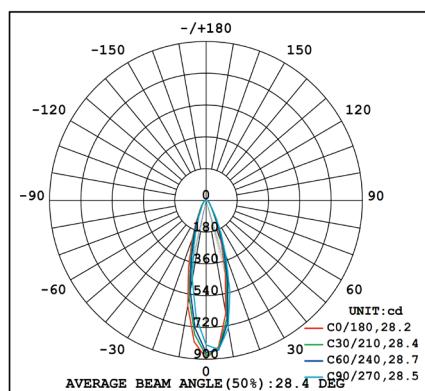

- **Certificates**



**IECEE**

**RoHS**



Street 77, 2nd Industrial City  
P.O. Box 353, Dammam-3141



Tel: +966-(013) 812-2020  
Fax: +966-(013) 812-2250



info@nlc.com.sa  
www.nlc.com.sa