



CANNON

UP TO 125 LM/W

Precision Lighting in Every Form.



Minimal
GLARE



90° Adjustable tilt for
precise light direction



5 Years WARRANTY

Multi Mounted Luminaires

A versatile modular spotlight system designed for flexible configuration, offering interchangeable lenses, heads, and trims to achieve precise, high-quality lighting in any space.



• APPLICATION



Residential



Museums



Hospital



Retail projects



Offices



Lobbies



Hotels



Shopping malls

• CHARACTERISTICS & SPECIFICATIONS TABLE

• Technical Parameters

Input Voltage: 220-240VAC | 50/60Hz

Power Factor: > 0.95

THD: < 10


Surge protection options (kV): 1KV (L-N), 2KV (L/N-PE)

Working Temp (ta): -20°C~+45°C

Electrical class: Class II 

Operating Humidity: 10-85% RH

Color Temperature :



• Features

Housing : Aluminum

Mounting: Recessed | Surface Mounted | Track Mounted

Optics: Lens

Body Finish: Powder Coating

Body Color: Available Colors: Black, White

Lifetime : L70B50 > 50,000h | L80B20 > 30,000h

LED Type: COB

IP Rating: IP20

Dimming: Optional

Switching Cycles: > 25,000 times

Flicker-Free:



• Performance


Model	Power	Efficiency	System Lumen	Beam Angle	CRI	Source
NLC-CAR	11W	85LM/W	935LM	19° 29° 44° 56°	Standard: >90 Optional: >95	
	14W	116LM/W	1424LM	18° 27° 38° 54°		
	24W	124LM/W	2976LM	14° 28° 40° 50°		
	36W	125LM/W	4500LM	16° 20° 30° 45°		
NLC-CAS	11W	85LM/W	935LM	19° 29° 44° 56°		
	14W	116LM/W	1424LM	18° 27° 38° 54°		
	24W	124LM/W	2976LM	14° 28° 40° 50°		
	36W	125LM/W	4500LM	16° 20° 30° 45°		
NLC-CAT	11W	85LM/W	935LM	19° 29° 44° 56°		
	14W	116LM/W	1424LM	18° 27° 38° 54°		
	24W	124LM/W	2976LM	14° 28° 40° 50°		
	36W	125LM/W	4500LM	16° 20° 30° 45°		

*Above values are calculated based on the product with CCT 3000K


*Values shown are subject to $\pm 10\%$ tolerance

• Drawing

NLC-CAR11W - 4K
H1 173 | H2 100 | H3 36 | H4 36 x D45mm




NLC-CAR14W - 4K
H1 210 | H2 130 | H3 42 | H4 36 x D62mm







NLC-CAR24W - 4K
H1 238 | H2 148 | H3 45 | H4 42 x D72mm

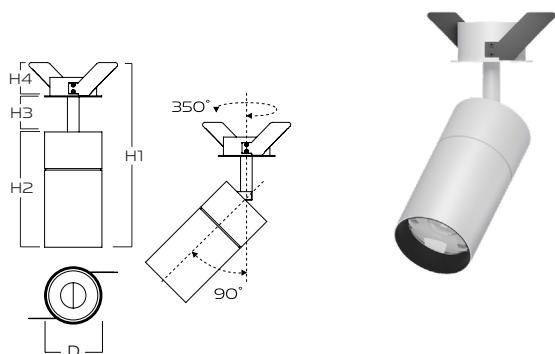


NLC-CAR36W - 4K
H1 255 | H2 160 | H3 50 | H4 42 x D90mm

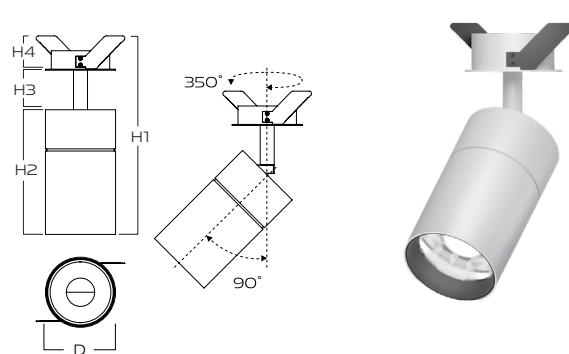


NLC-CAS11W - 4K
H1 153 | H2 100 | H3 36 x D45mm

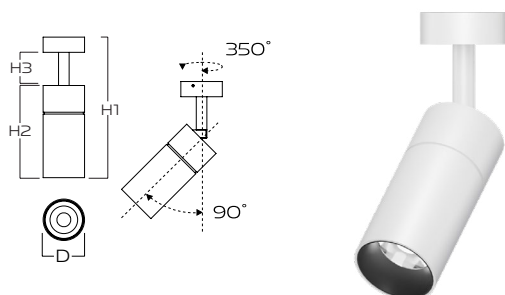


NLC-CAS14W - 4K
H1 189 | H2 130 | H3 42 x D62mm

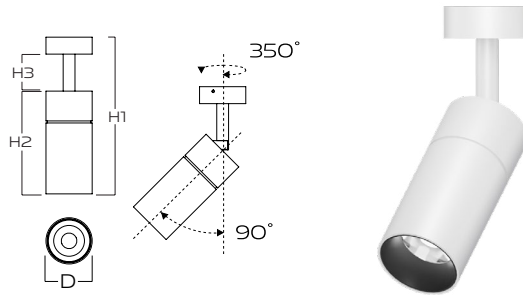


NLC-CAS24W - 4K
H1 210 | H2 148 | H3 45 x D73mm

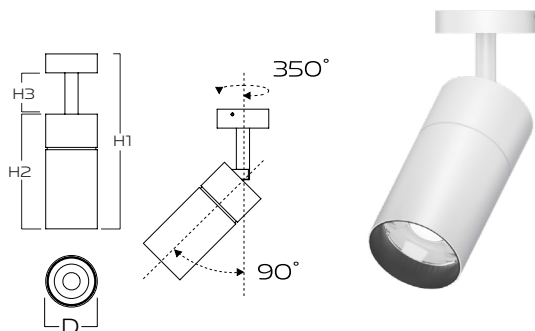


NLC-CAS36W - 4K
H1 227 | H2 160 | H3 50 x D90mm

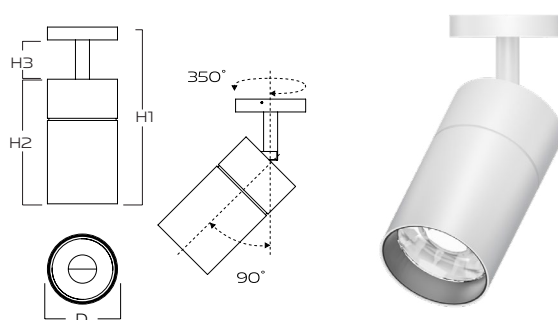


NLC-CAT11W - 4K
H1 188 | H2 100 | H3 36 x D45mm

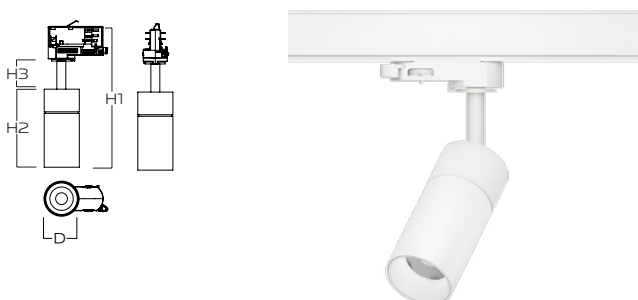


NLC-CAT14W - 4K
H1 225 | H2 130 | H3 42 x D62mm

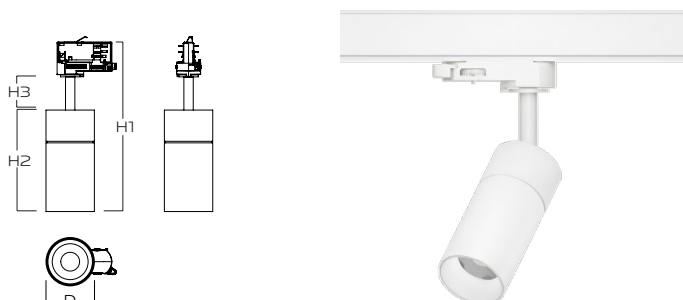


NLC-CAT24W - 4K
H1 245 | H2 148 | H3 45 x D73mm

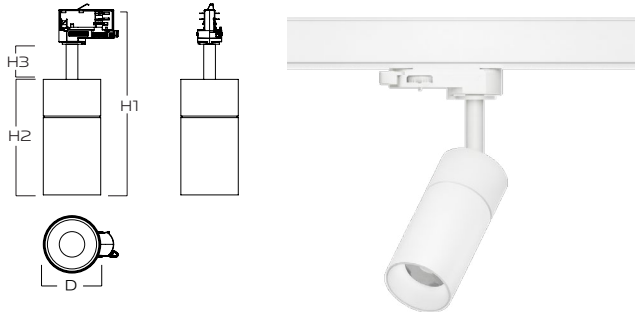

NLC-CAT36W - 4K
H1 262 | H2 160 | H3 50 x D90mm

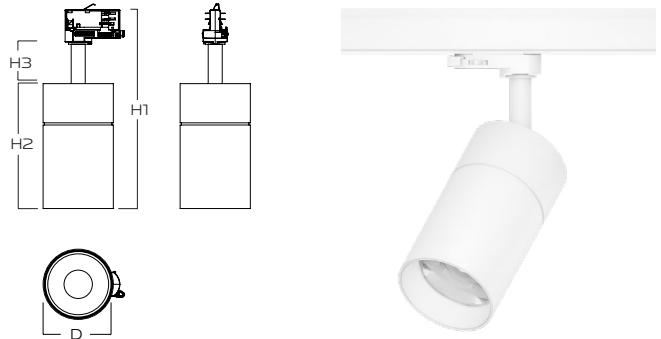

• Accessories



Honeycomb Louvre




Linear Spread Glass




Glass

• Light Distribution Curve


NLC-CAR11W - 4K | NLC-CAS11W - 4K | NLC-CAT11W - 4K

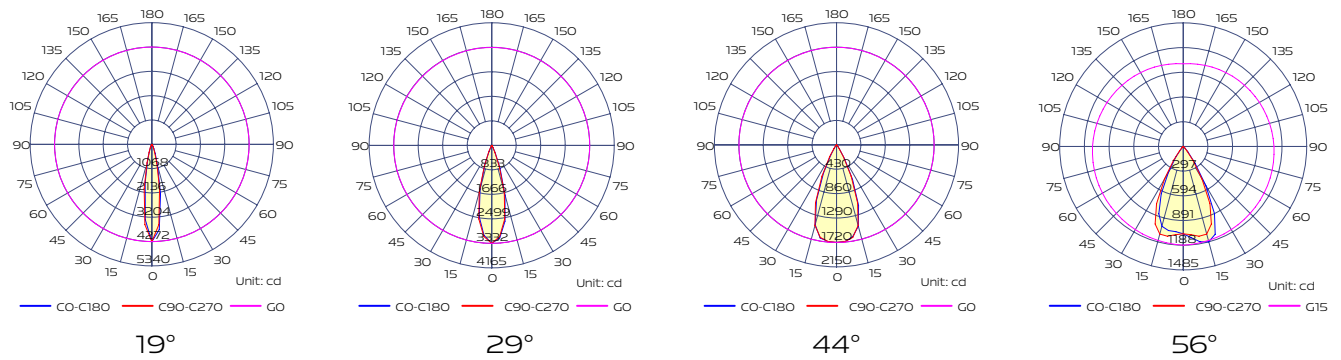


NLC-CAR14W - 4K | NLC-CAS14W - 4K | NLC-CAT14W - 4K

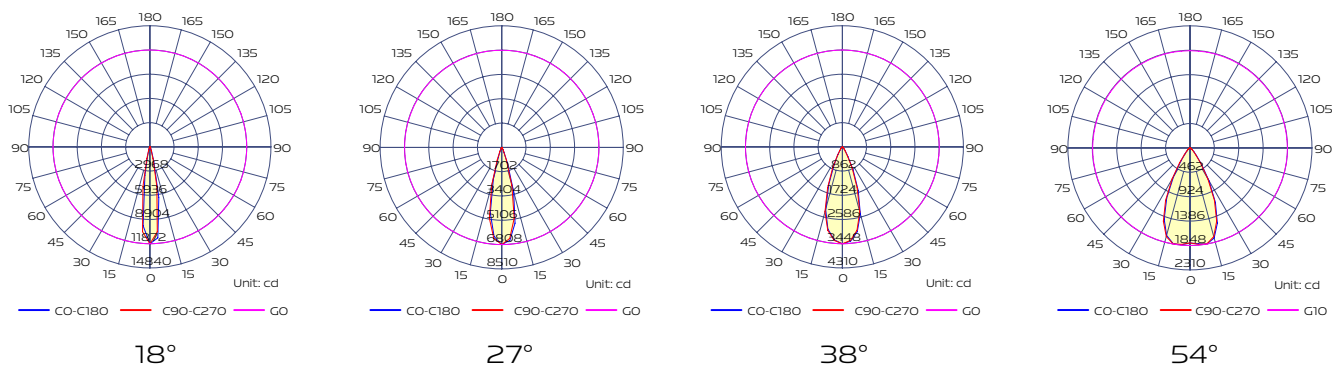


NLC-CAR24W - 4K | NLC-CAS24W - 4K | NLC-CAT24W - 4K




14°



28°




40°




50°


NLC-CAR36W - 4K | NLC-CAS36W - 4K | NLC-CAT36W - 4K




16°



20°



30°



45°

• Certificates



CB

IECEE

RoHS



Street 77, 2nd Industrial City
P.O. Box 353, Dammam-3141



Tel: +966-(013) 812-2020
Fax: +966-(013) 812-2250



info@nlc.com.sa
www.nlc.com.sa