

AGILE

UP TO 97 lm/w
Light Where You Need It



IP65



IK06



High
Efficiency



Low
Uncomfortable
Glare



Compact
Design



Warranty



Experience premium lighting with adjustable angles and minimalist aesthetics. Perfect for residential and commercial interiors.

• APPLICATION



Residential Areas



Galleries and Museums



Hospitality Spaces



Reception Areas



Retail Stores



Offices and Meeting Rooms

• CHARACTERISTICS & SPECIFICATIONS TABLE

Technical Parameters

Input:	220-240VAC 50/60Hz
Power Factor:	>0.95
DF:	>0.95
THD:	<15
Surge protection options (kV):	1KV (L-N), 2KV (L/N-PE)
Working Temp (ta):	-20°C to + 45°C
Electrical class:	Class II
Operating Humidity:	20-85% RH
Color Temperature:	

Features

Housing :	Aluminium
Mounting:	Recessed
Optics:	PC / PMMA
Body Finish:	Electrostatic Polyester Powder-Coated
Body Color:	Available Colors: White/Black
Lifetime :	L70B50 > 100,000h L80B20 > 50,000h
LED Type:	COB
Emergency Backup:	Optional
Dimming:	Optional
Switching Cycles:	>50,000 times
Flicker Free:	
UGR:	<16

• PERFORMANCE


Model	Power	Efficiency	Lumen	Beam Angle	CRI	Source
NLC-AG	8W 14W 25W	90lm/W 93lm/W 97lm/W	720lm 1302lm 2425lm	15°, 24°, 36°, 55°	Standard:>90 Optional:>95	

*Above values are calculated based on the product with CCT 4000K

*Values shown are subject to ±10% tolerance

• DRAWING

8W D60 x H80mm Cut size: 55mm	14W D82 x H97.8mm Cut size: 75mm	25W D110 x H125mm Cut size: 95mm
-------------------------------------	--	--

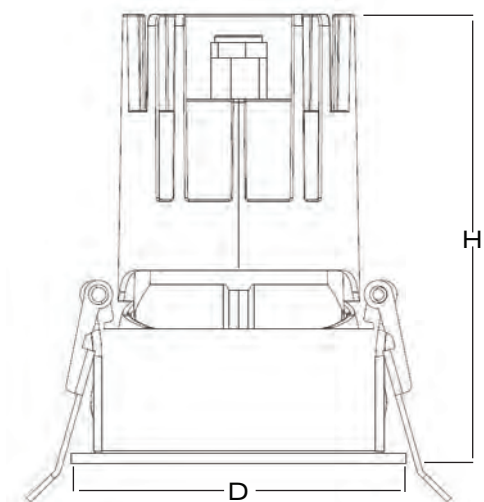

• REFLECTOR COLOR OPTIONS



Black



Chrome






Shine Black



White

• LIGHT DISTRIBUTIONS CURVE

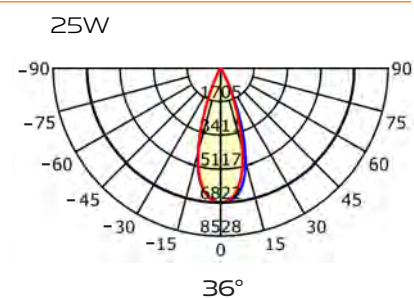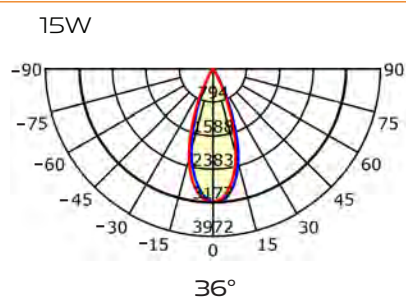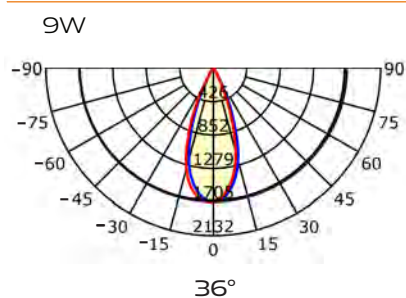

• CERTIFICATES



CB



RoHS



Street 77, Second Industrial City
P.O. Box 353, Dammam-3141



Tel: +966-(013) 812-2020
Fax: +966-(013) 812-2250



info@nlc.com.sa
www.nlc.com.sa