

SLEEK

UP TO 150 lm/w
Slim, Suspended, High-Power Lighting



IP66



IK08



Internal: DM 6KV / CM 10KV
External: 10KV / 20KV



WARRANTY



With its slim, modern design and lightweight body, this suspended luminaire delivers high performance with a sleek appearance. It provides uniform, glare free illumination, ideal for large scale industrial and commercial spaces.

• APPLICATION

 Workshop	 Industrial Halls	 Large Areas
 Factories	 Warehouse	 Airplane Hangers
 Electromechanical Room	 Sport Facilities	 Exhibition Center

• CHARACTERISTICS & SPECIFICATIONS TABLE

Technical Parameters

Input:	100-277V 50/60Hz
Power Factor:	>0.95
THD:	<10 @ 220V full load / <20 @ 100-277V full load
Surge protection options (kV)	Internal: DM 6KV / CM 10KV External: 10KV / 20KV
Electric class:	Class I 
Working Temp (ta):	-40°C ~ +50°C
Color Temperature :	

Features


Housing :	Die-Cast Aluminum
Mounting:	Hook and Loop Mounting
Optics :	PC Lens and Tempered Glass
Body Finish:	Powder-Coated
Body Color:	Available Colors: Gray, Black
Lifetime :	L70B50 > 100,000h / L80B20 > 50,000h
LED Type:	SMD3030
Emergency Backup:	Optional
Dimming:	0-10V/PWM/ Resistor dimming 
Switching Cycles:	>50,000 times
Flicker Free:	 Flicker Free

• PERFORMANCE




Model	Power	Efficiency	Lumen	Beam Angle	CRI	Source
NLC-SK	30W	150lm/W	4500lm	60° 90° 120°	Standard: >70 Optional: >80	
	50W		7500lm			
	80W		12000lm			
	100W		15000lm			
	120W		18000lm			
	150W		22500lm			

• Drawing

480D*177H

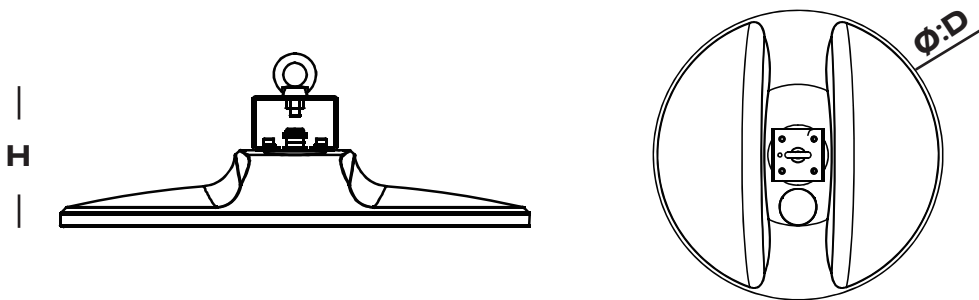

• LIGHT DISTRIBUTIONS Curve

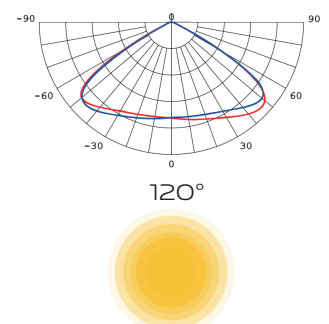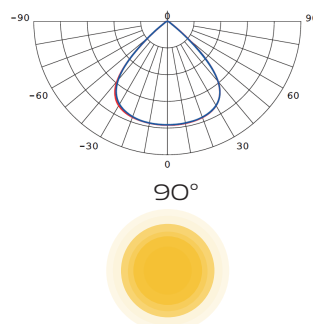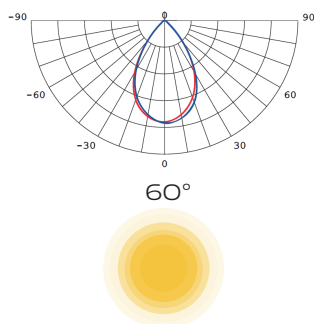

• Certificates



CB



RoHS

