





ST Series

IP

Photometric Data

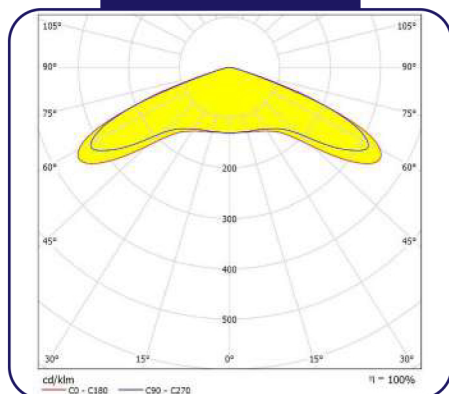

Drawing

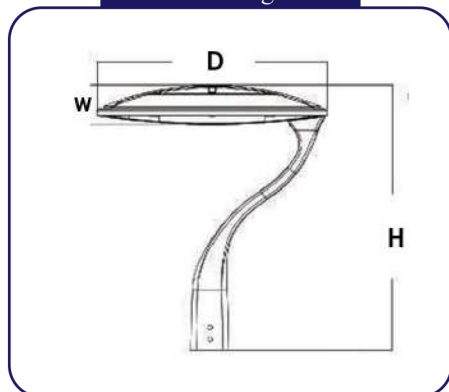

Applications

Outdoor - Neighborhoods, Parking Lots, Gas Stations, Parks, Walks

Mounting	Post top
THD	< 10
Power Factor	0.98
Housing	Die cast aluminum
Diffuser	Tempered glass
Internal Protection	IP 65
Impact Strength	IK 08
Weight	8.9 - 10.7 Kg
Efficacy	125 Lumens / Watt
Working Temp (ta)	60°C
Warranty	5 Years
Life Time	72,000 Hours
CRI	> 80

Certification

SASO 2902
UL Listed
LM79, ISTMT, TM21
Photobiological



Other Options

Dimming 0-10V
Photocell
Pole Slip Fitter
Cable suspended



Model	Power	Size (D x H x W)	Lumen	Voltage	CCT	Beam Angle
NLC IP	25W	460 x 530 x 80 mm	3125 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 5700K	145°
	50W		6250 LM			
	75W		9375 LM			
	120W		15000 LM			



Environment friendly product that is free of any hazardous materials