


SOLID

Precision in Motion



Outdoor



IP67



10KG



Warranty
can extend
to 5 Years




UV Resistant



Salt Water
Resistant



Flame
Resistance

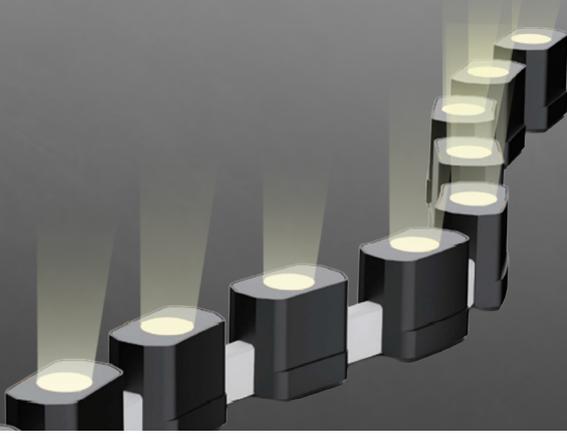

This flexible LED strip delivers smooth consistent light for creative and architectural applications. Compact, efficient, and built for long lasting performance.

• APPLICATION



Display & Showcase



Sign Outline Lighting



Car Interior Lighting



Bathroom



Freezer and Cooler Lighting



Outdoor Pathway



Boats Outline Lighting



Stair Lighting



Under Cabinet

• CHARACTERISTICS & SPECIFICATIONS TABLE

Technical Parameters

Input:	DC24V
Electrical class:	Class III 
Working Temp (ta):	-30°C to + 55°C
Operating Humidity:	<=90%
Color Temperature :	
Beam Angle	20° 30° 45° 60° Asymmetric

Features

Housing :	Dual-Color silicone Extrusion
Mounting:	Wall mounting / Ceiling Mounting
Lifetime :	L70B50 > 50,000h
LED Type:	SMD3030 / SMD3535
Min. bending radius	10 cm
Dimming:	Options
Switching Cycles:	>25,000 times
Flicker Free:	

• PERFORMANCE



Model	Power	System Lumen	CCT	Max. Length	Cutting Unit	LED Qty/m	CRI	Source
NLC-SO	24W	1450 lm	2700K	4.8mtrs	150mm	20/m	Standard: >80 Optional: >90	
		1510 lm	3000K					
		1560 lm	4000K					
		1560 lm	5000K					
		1560 lm	6500K					
		550 lm	Red					
		1240 lm	Green					
		300 lm	Blue					
		800 lm	RGB		300mm			
		827 lm	RGBW					

*Values shown are subject to ±10% tolerance






• **DRAWING**

H31.6 x W1 27.4mm | W2 25.5

Wire drawing •

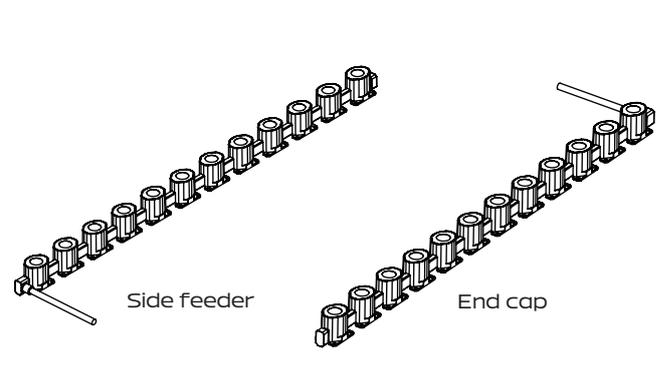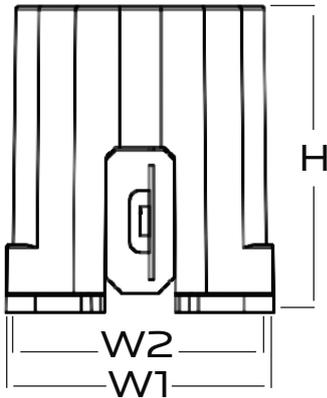

• **LIGHT DISTRIBUTIONS CURVE**

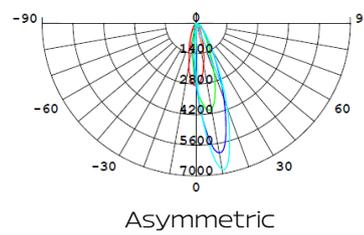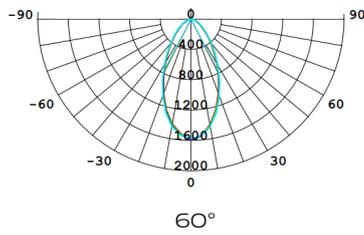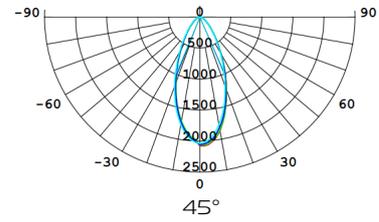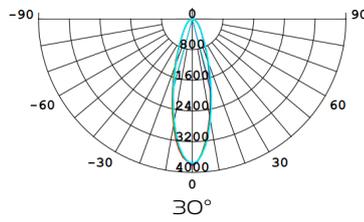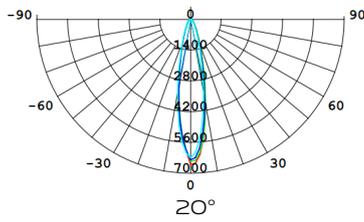

• **CERTIFICATES**



CB



RoHS

