





AR Series

AR-02

Photometric Data

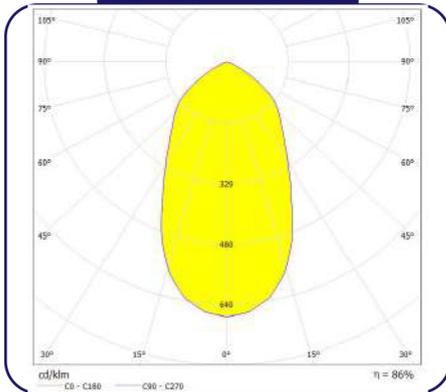

Drawing

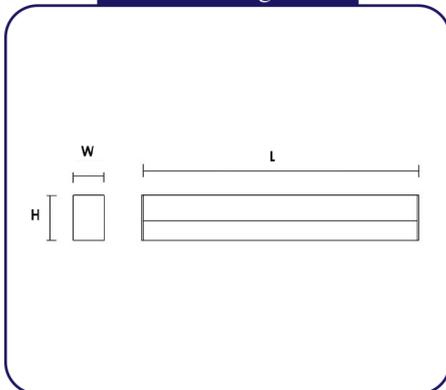

Applications

Indoor - Toilet, Clinic, Kitchen, Barber shop,
Door top

Mounting

Wall

THD

< 10

Power Factor

0.95

Housing

Stainless steel

Diffuser

PMMA

Internal Protection

IP 44

Impact Strength

IK 06

Weight

0.9 - 1.9 Kg

Efficacy

100 Lumens / Watt

Working Temp (ta)

50°C

Warranty

5 Years

Life Time

72,000 Hours

CRI

> 80

Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



Other Options

Dimming 0-10V

Flexible Size



Model	Power	Size (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC AR-02	12W	581 x 50 x 70mm	1200 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	110°
	24W	1141 x 50 x 70mm	2400 LM		4000K 6000K	

