




OT Series

OT-03-DS


Applications	Outdoor - Entrances, Building walls, Fences, Door top
Mounting	Wall
THD	< 10
Power Factor	0.95
Housing	Die-cast aluminum
Diffuser	Clear glass
Internal Protection	IP 65
Impact Strength	IK 09
Weight	2.1- 4.3 Kg
Efficacy	125 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	72,000 Hours
CRI	> 80
Certification	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological
Other Options	Emergency Backup - 3 Hr Dimming 0-10V



Photometric Data

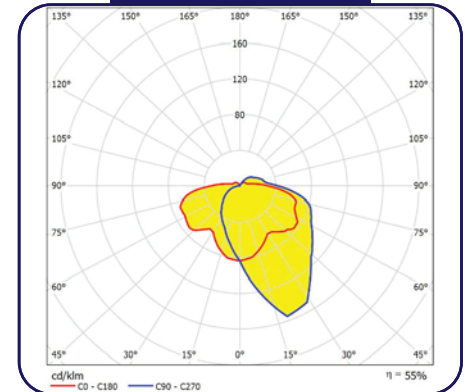

Drawing

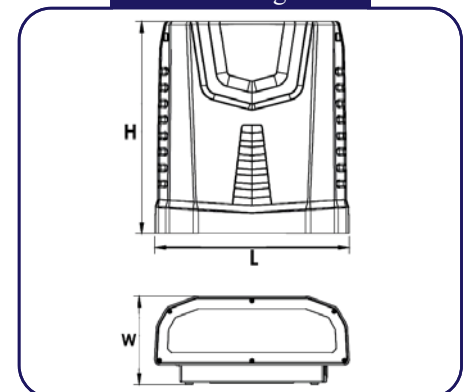

Model	Power	Size (H x L x W)	Lumen	Voltage	CCT	Beam Angle
OT-03-DS	30W	207 x 200 x 108 mm	3750 LM	220-240V/50/60Hz	3000K	120°
	50W		6250 LM		4000K	
	70W	285 x 265 x 118 mm	8750 LM	5000K		
	80W		10000 LM			
	100W		12500 LM			

Environment friendly product that is free of any hazardous materials

