





WP Series

712S

Photometric Data

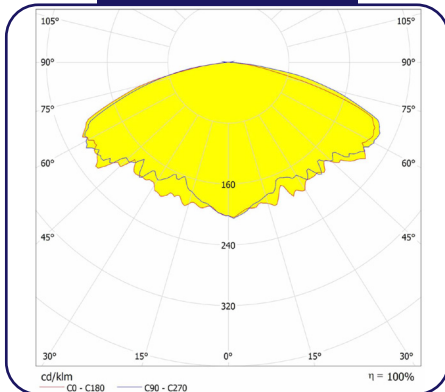

Drawing

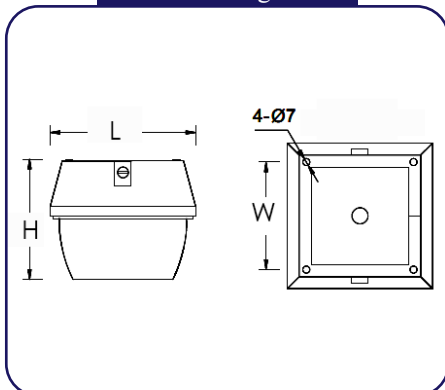

Applications

Indoor & Outdoor- Parking garages, Factories, Canopy, Workshops, Electro-mech room, Store rooms

Mounting

Surface

THD

< 10

Power Factor

0.98

Housing

Die cast aluminum

Diffuser

PMMA

Internal Protection

IP 65

Impact Strength

IK 10

Weight

9.2 Kg

Efficacy

100 Lumens / Watt

Working Temp (ta)

55°C

Warranty

5 Years

Life Time

50,000 Hours

CRI

> 80

Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



Other Options

Emergency Backup - 3 Hr

Dimming 0-10V

Dali Interface



Model	Power	Size (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC 712S	10W	225 x 166 x 185 mm	1000 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6000K	120°
	15W		1500 LM			
	25W		2500 LM			

