





## AR Series

## AR-02

### Photometric Data

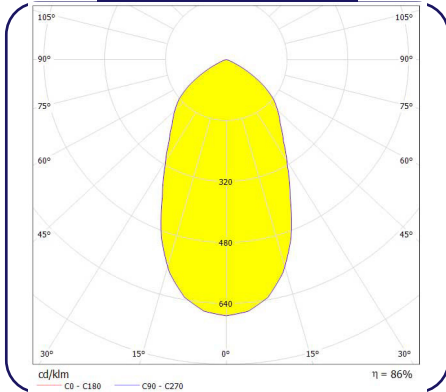

### Drawing

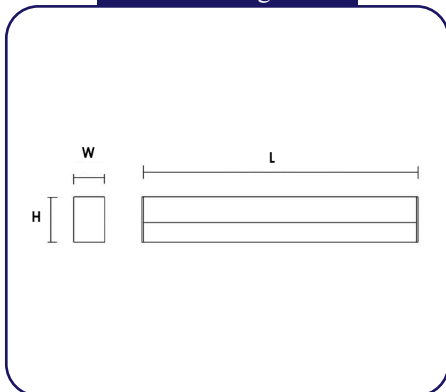

### Applications

Indoor - Toilet, Clinic, Kitchen, Barber shop, Door top

### Mounting

Wall

### THD

< 10

### Power Factor

0.95

### Housing

Stainless steel

### Diffuser

PMMA

### Internal Protection

IP 44

### Impact Strength

IK 06

### Weight

0.9 - 1.9 Kg

### Efficacy

100 Lumens / Watt

### Working Temp (ta)

50°C

### Warranty

5 Years

### Life Time

72,000 Hours

### CRI

> 80

### Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



### Other Options

Dimming 0-10V

Flexible Size



Model	Power	SIze (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC AR-02	12W	581 x 50 x 70mm	1200 LM	220-240V/50/60Hz	3000K	110°
	24W	1141 x 50 x 70mm	2400 LM	110-277V/ 50/60Hz	4000K 6000K	

