




AR Series

AR-03


<b>Applications</b>	Indoor - Toilet, Clinic, Kitchen, Barber shop, Door top
<b>Mounting</b>	Wall
<b>THD</b>	< 10
<b>Power Factor</b>	0.95
<b>Housing</b>	Stainless steel
<b>Diffuser</b>	PMMA
<b>Internal Protection</b>	IP 65
<b>Impact Strength</b>	IK 06
<b>Weight</b>	0.9 - 1.9 Kg
<b>Efficacy</b>	100 Lumens / Watt
<b>Working Temp (ta)</b>	50°C
<b>Warranty</b>	5 Years
<b>Life Time</b>	72,000 Hours
<b>CRI</b>	> 80
<b>Certification</b>	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological
<b>Other Options</b>	Dimming 0-10V Flexible Size



Photometric Data

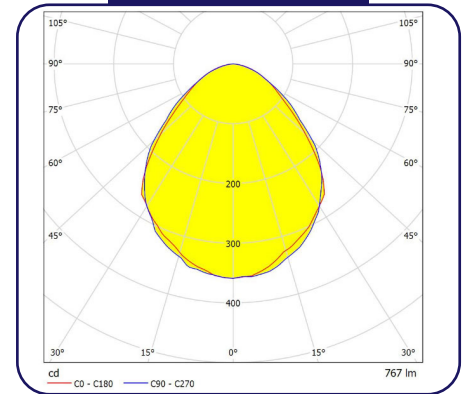

Drawing

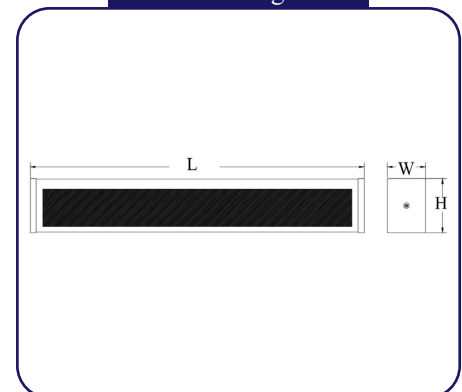

Model	Power	Size (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC AR-03	12W	603 x 72 x 97mm	1200 LM	220-240V/50/60Hz	3000K	110°
	24W	1165 x 72 x 97mm	2400 LM	110-277V/ 50/60Hz	4000K 6000K	

Environment friendly product that is free of any hazardous materials

