





**AR Series**

**AR-04**

**Photometric Data**

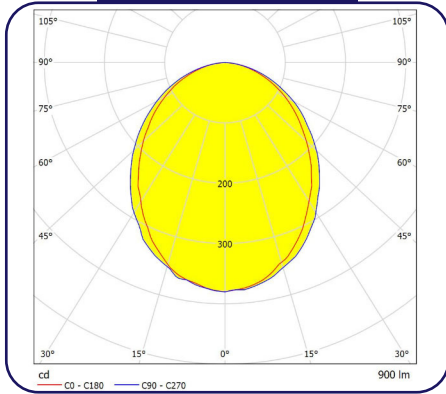

**Drawing**

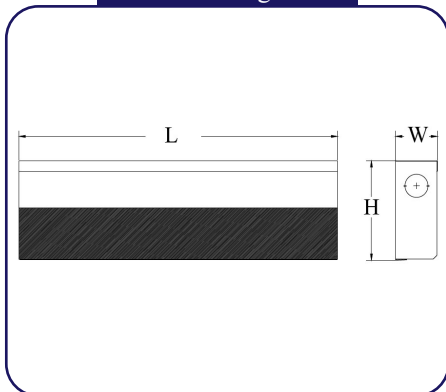

**Applications**

Indoor - Under cabinet lighting, Wardrobe

**Mounting**

Surface

**THD**

< 10

**Power Factor**

0.95

**Housing**

Iron phosphated steel

**Diffuser**

PMMA

**Internal Protection**

IP 20

**Impact Strength**

IK 06

**Weight**

0.9 - 1.9 Kg

**Efficacy**

100 Lumens / Watt

**Working Temp (ta)**

50°C

**Warranty**

5 Years

**Life Time**

72,000 Hours

**CRI**

> 80

**Certification**

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



**Other Options**

Dimming 0-10V



Model	Power	Size (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC AR-04	6W	305 x 40 x 95mm	600 LM	220-240V/50/60Hz	3000K	110°
	12W	585 x 40 x 95mm	1200 LM	110-277V/ 50/60Hz	4000K 6000K	



Environment friendly product that is free of any hazardous materials