



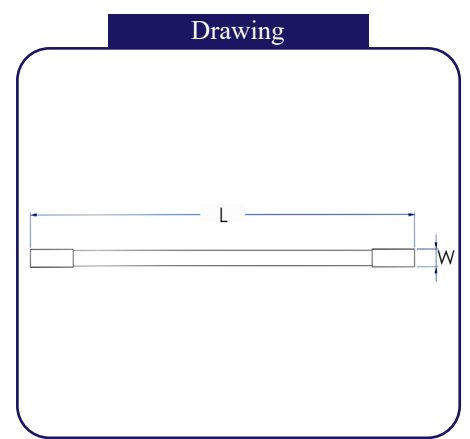

AR Series / **AR-05**

Applications	Indoor - Toilet, Clinic, Kitchen, Barber shop, Door top
Mounting	Wall
THD	< 10
Power Factor	0.95
Housing	Stainless steel
Diffuser	PMMA
Internal Protection	IP 44
Impact Strength	IK 06
Weight	0.9 - 1.9 Kg
Efficacy	100 Lumens / Watt
Working Temp (ta)	50°C
Warranty	5 Years
Life Time	72,000 Hours
CRI	> 80
Certification	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological
Other Options	Dimming 0-10V

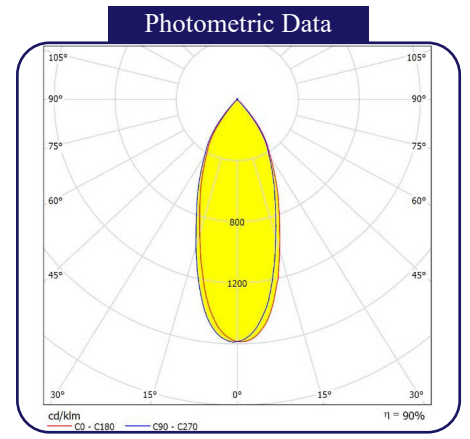

Model	Power	Size (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC AR-05	12W	635 x 66 x 44mm	1200 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6000K	110°

Environment friendly product that is free of any hazardous materials 

