


**AR Series 2835**

<b>Applications</b>	Indoor - Office, Clinic, Class room, Corridor, Reception, Retail shop
<b>Mounting</b>	Recessed
<b>THD</b>	< 10
<b>Power Factor</b>	0.95
<b>Housing</b>	Flexible PCB
<b>Efficacy</b>	100 Lumens / Watt
<b>Working Temp (ta)</b>	50°C
<b>Warranty</b>	5 Years
<b>Life Time</b>	60,000 Hours
<b>CRI</b>	> 80
<b>Certification</b>	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological
<b>Other Options</b>	Dimming 0-10V Dali Interface PMMA diffuser Direct (AC) IP 67 (Silicon Isolated)

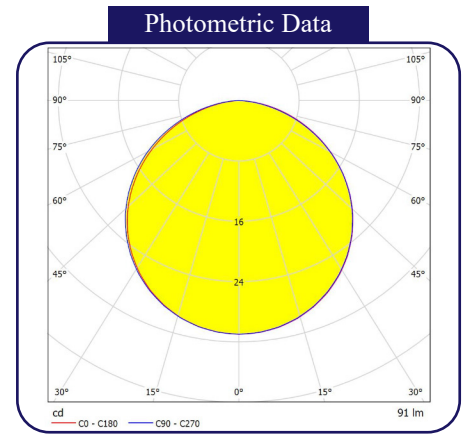

**Accessories**

- Surface profile
- Recessed profile
- End cap profile
- Connectors
- Plastic base

Model	Power	Size	Voltage	CCT	Beam Angle
NLC 2835	5W/Meter	5M/Roll	220-240V/50/60Hz	3000K	120°
	15W/Meter			4000K	
	24W/Meter	50M/Roll	100-277V/50/60Hz	6000K	
				RGB	

Environment friendly product that is free of any hazardous materials

