





DL Series

DL-03

Photometric Data

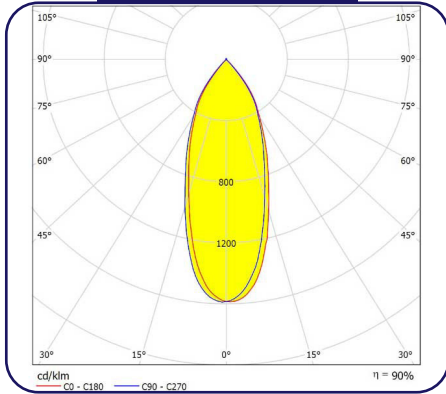

Drawing

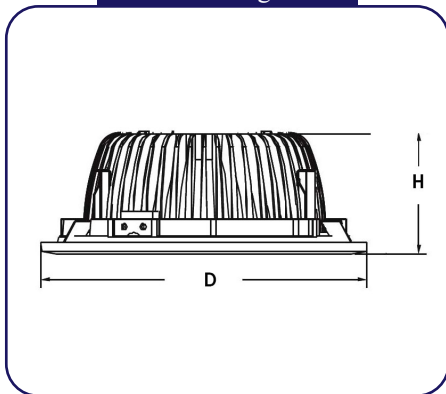

Applications

Indoor - Office, Clinic, Class room, Corridor, Kitchen, Retail shop, Showroom, Toilet

Mounting

Recessed

THD

< 10

Power Factor

0.95

Housing

Die-cast aluminium

Diffuser

PMMA

Internal Protection

IP 54

Impact Strength

IK 05

Weight

0.8 - 1.2 Kg

Efficacy

100 Lumens / Watt

Working Temp (ta)

50°C

Warranty

5 Years

Life Time

60,000 Hours

CRI

> 80

Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



Other Options

Emergency Backup - 3 Hr

Dimming 0-10V

Dali Interface

Square option

Gear Box



Model	Power	Size (D x H)	Lumen	Voltage	CCT	Beam Angle
NLC DL-03	14W	140 x 45 mm	1400 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6000K	90°
	25W	170 x 47 mm	2500 LM			
	35W	225 x 47 mm	3500 LM			
	50W		5000LM			



Environment friendly product that is free of any hazardous materials