





## EM Series

## EM-02

### Photometric Data

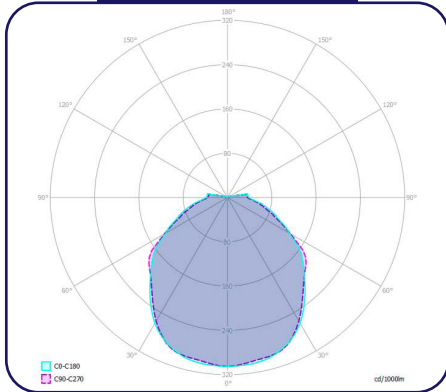

### Drawing

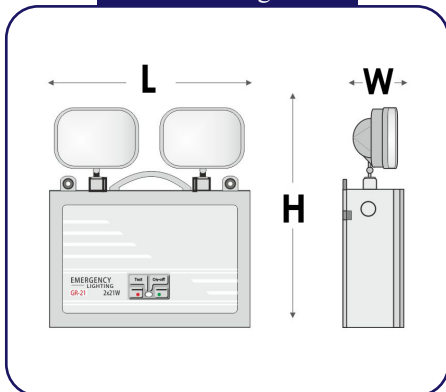

### Applications

Indoor - Office, Clinic, Class room,  
Corridor, Kitchen, Retail shop

### Mounting

Wall

### Source

LED

### Housing

Re-inforced fiber glass

### Operating Mode

Non Maintained

### Emergency Backup

3 Hr

### Internal Protection

IP 42

### Impact Strength

IK 03

### Weight

5.7 Kg

### Working Temp (ta)

50°C

### Warranty

5 Years

### Life Time

100,000 Hours

### CRI

> 80

### Certification

SASO 2902



ENEC Listed



### Other Options

IP 65

UL Listed



Model	Power	Size (L x H x W)	Lumen	Voltage
NLC EM-02	5.6W	302 x 330 x 94 mm	800 LM	220-240V/50/60Hz
	13W		1800 LM	
	14W		3200 LM	110-277V/ 50/60Hz

