





EM Series

GR-939

Photometric Data

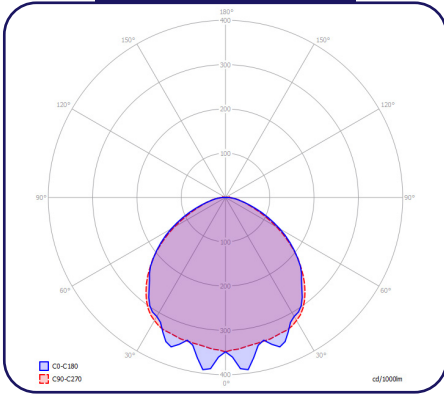

Drawing

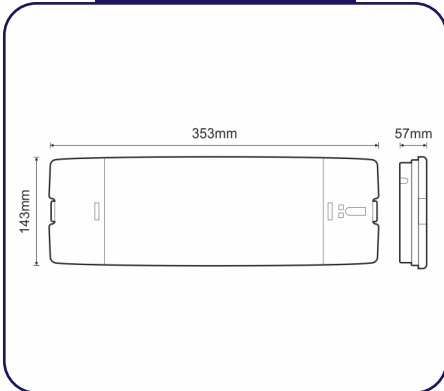

Applications

Indoor - Office, Clinic, Class room,  
Corridor, Kitchen, Retail shop

Mounting

Wall

Source

LED

Housing

Re-inforced fiber glass

Diffuser

Transparent polycarbonate

Emergency Backup

3 Hr

Internal Protection

IP 65

Impact Strength

IK 05

Weight

0.9 Kg

Number of Faces

Single Face

Working Temp (ta)

50°C

Warranty

5 Years

Life Time

100,000 Hours

CRI

> 80

Certification

SASO 2902



ENEC Listed



Other Options

Dali Interface



Model	Size (L x H x W)	Wattage	Lumen	Voltage	Mode
NLC GR-939	353 x 143 x 57 mm	3W	105 LM	220-240V/50/60Hz	M- Maintained
		6W	210 LM	110-277V/50/60Hz	NM- Non Maintained

مخرج  
EXIT

EXIT مخرج



مخرج الطوارئ  
EMERGENCY EXIT



Environment friendly product that is free of any hazardous materials