






EM Series / **GVEX**


Applications Indoor - Office, Clinic, Class room, Corridor, Kitchen, Retail shop

Mounting	Wall / Ceiling
Source	LED
THD	< 10
Housing	High-temperature thermoplastic
Text Type	Engraved English only
Emergency Backup	3 Hr
Internal Protection	IP 65
Impact Strength	IK 05
Weight	1 Kg
Number of Faces	Single Face or Double Face
Working Temp (ta)	50°C
Warranty	5 Years
Life Time	100,000 Hours
CRI	> 80
Certification	SASO 2902  UL Listed 


Photometric Data

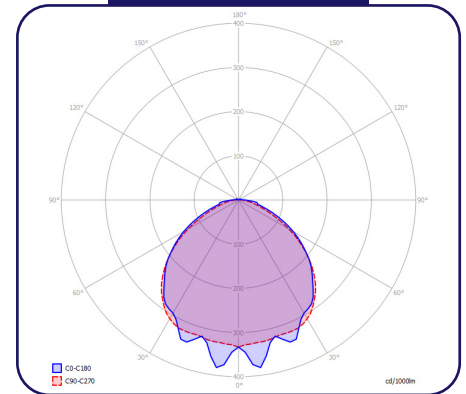

Drawing

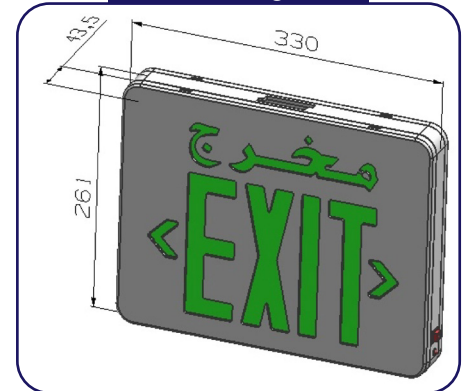

Drawing

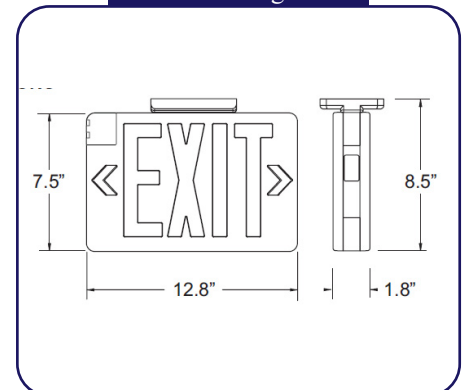

Model	Text	Size (L x H x W)	Wattage	Letter color	Voltage
NLC GVEX	English	325 x 190 x 43.5 mm	3.8W	R- Red	220-240V/50/60Hz
	Arabic & English	330 x 261 x 43.5 mm		G- Green	110-277V/ 50/60Hz

Environment friendly product that is free of any hazardous materials 