





ST Series

IP

Photometric Data

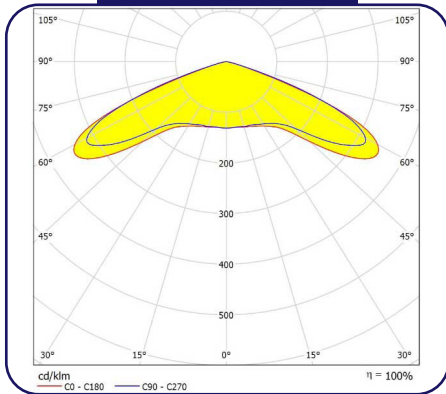

Drawing

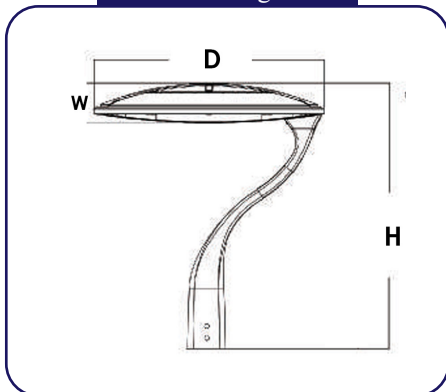

Applications

Outdoor - Neighborhoods, Parking Lots, Gas Stations, Parks, Walks

Mounting

Post top

THD

< 10

Power Factor

0.98

Housing

Die cast aluminum

Diffuser

Tempered glass

Internal Protection

IP 65

Impact Strength

IK 08

Weight

8.9 - 10.7 Kg

Efficacy

125 Lumens / Watt

Working Temp (ta)

60°C

Warranty

5 Years

Life Time

72,000 Hours

CRI

> 80

Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



Other Options

Dimming 0-10V

Photocell

Pole Slip Fitter

Cable suspended



Model	Power	Size (D x H x W)	Lumen	Voltage	CCT	Beam Angle
NLC IP	25W	460 x 530 x 80 mm	3125 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 5700K	145°
	50W		6250 LM			
	75W		9375 LM			
	120W		15000 LM			



Environment friendly product that is free of any hazardous materials