





FL Series

L64

Photometric Data

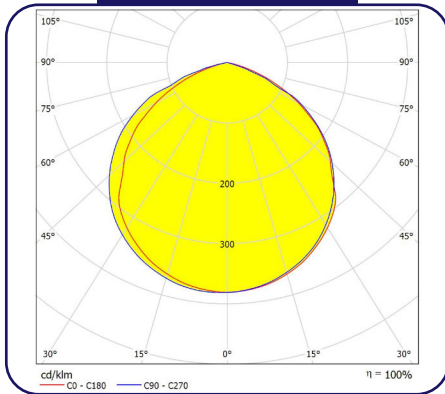

Drawing

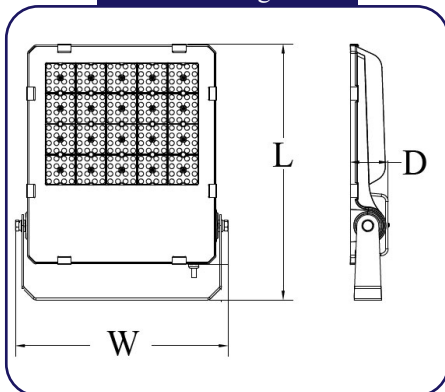

Applications

Outdoor - Areas, Farms, Building Washers, Parking Area

Mounting

Trunion - Pole / Wall

THD

< 10

Power Factor

0.98

Housing

Die cast aluminum

Diffuser

Clear silk printed tempered glass

Internal Protection

IP 65

Impact Strength

IK 07

Weight

1.4- 4.6 Kg

Efficacy

130 Lumens / Watt

Working Temp (ta)

50°C

Warranty

5 Years

Life Time

72,000 Hours

CRI

> 80

Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



Other Options

Dimming 0-10V

Photocell



Model	Power	Size (L x W x D)	Lumen	Voltage	CCT	Beam Angle
NLC L64	30W	267 x 226 x 44 mm	3900 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	30°
	50W		6500 LM			4000K
	100W	362 x 299 x 54 mm	13000 LM		5700K	90°
	150W	420 x 349 x 62 mm	19500 LM			150°
	200W		26000 LM			

