





EM Series

L650

Photometric Data

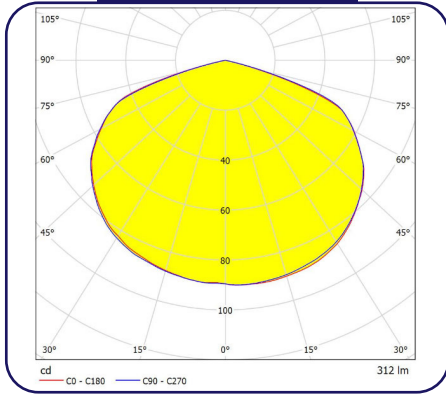

Drawing

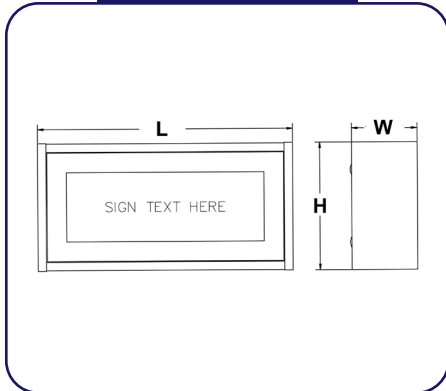

Applications

Indoor - Office, Clinic, Class room,
Corridor, Kitchen, Retail shop

Mounting

Wall

Source

LED

Housing

Iron Phosphated Steel

Emergency Backup

3 Hr

Operating Mode

Maintained / Non Maintained

Internal Protection

IP 23

Impact Strength

IK 03

Weight

1.9 Kg

Number of Faces

Single Face or Double Face

Text Type

Arabic & English

Working Temp (ta)

50°C

Warranty

5 Years

Life Time

50,000 Hours

CRI

> 80

Certification

SASO 2902



UL Listed



Other Options

Customized Text - Sticker
Right & Left Arrow
Flexible Size
Recessed
IP 54



Model	Power	Size (L x H x W)	Lumen	Voltage	CCT	No. of Faces
NLC L650	6W	400 x 200 x 103 mm	600 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	1- Single Face
	12W	660 x 200 x 103 mm	1200 LM		4000K 5000K	2- Double Face

مخرج
EXIT

EXIT مخرج



مخرج الطوارئ
EMERGENCY EXIT



Environment friendly product that is free of any hazardous materials