





FL Series

L900

Applications	Outdoor - Sport Fields, Airports, Stadiums
Mounting	Trunion - Pole / Pendant
THD	< 10
Power Factor	0.98
Housing	Die-casting Aluminum
Diffuser	Polycarbonate lens
Internal Protection	IP 66
Impact Strength	IK 10
Weight	14-18 Kg
Efficacy	150 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	72,000 Hours
CRI	> 80
Certification	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological



Other Options	Dimming 0-10V Photocell A= Top Fixed B=Under Mount Yoke (with driver box) C=Under Mount Yoke (split mode) D=Yoke Mount D=Add a Slip Fitter Hood / Shield
----------------------	---

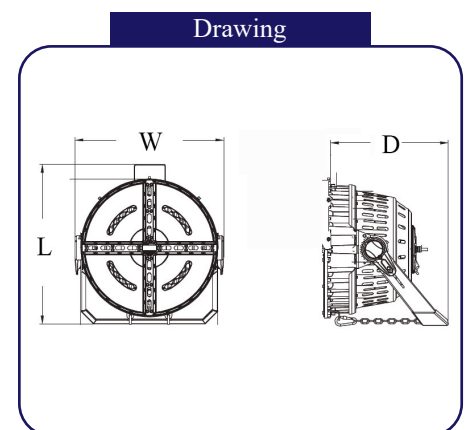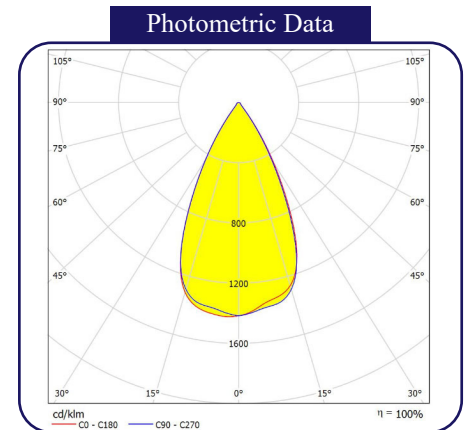

Model	Power	Size (L x W x D)	Lumen	Voltage	CCT	Beam Angle
NLC L900	300W	509 x 452 x 632 mm	45000 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	15°
	400W		60000 LM			
	500W		75000 LM			
	600W		90000 LM		4000K	30°
	700W	591 x 554 x 724 mm	105000 LM			
	800W		120000LM			
	1000W		150000 LM		5700K	80°

Environment friendly product that is free of any hazardous materials

