







EM Series / **LX-740**

Applications	Indoor - Office, Clinic, Class room, Corridor, Kitchen, Retail shop
Mounting	Universal bracket for Ceiling & Wall
Power	3.8W
Source	LED
Housing	Extruded Aluminum
Emergency Backup	3 Hr
Operating Mode	Maintained
Internal Protection	IP 23
Impact Strength	IK 03
Weight	1.9 Kg
Number of Faces	Single Face or Double Face
Text Type	Engraved Arabic & English
Working Temp (ta)	50°C
Warranty	5 Years
Life Time	100,000 Hours
CRI	> 80
Certification	SASO 2902  UL Listed 

Other Options Customized Text - Sticker
Right & Left Arrow

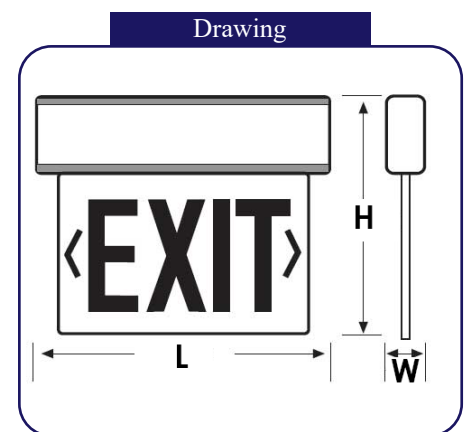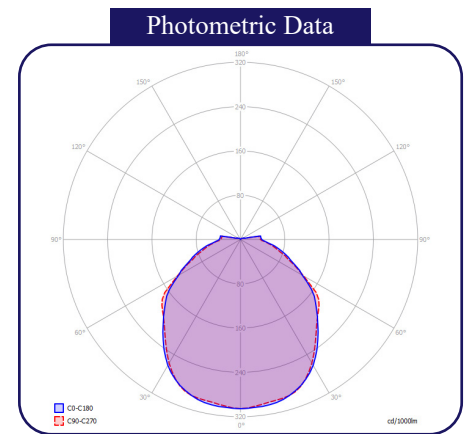

Model	Size (L x H x W)	No. of Faces	Panel Colour	Voltage
NLC LX-740	330 x 283 x 44 mm	1- Single Face	RC-Red on clear GC-Green on clear	220-240V/50/60Hz
		2- Double Face	RM-Red on mirror GM-Green on mirror	110-277V/ 50/60Hz

Environment friendly product that is free of any hazardous materials 