





OT Series

OT-03

Photometric Data

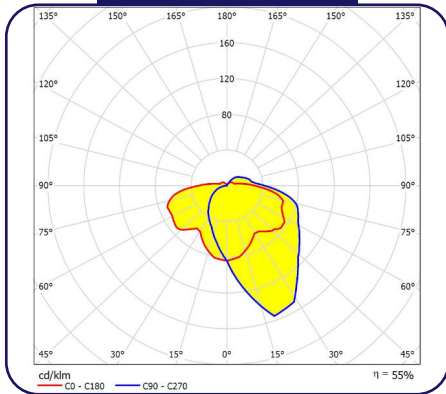

Drawing

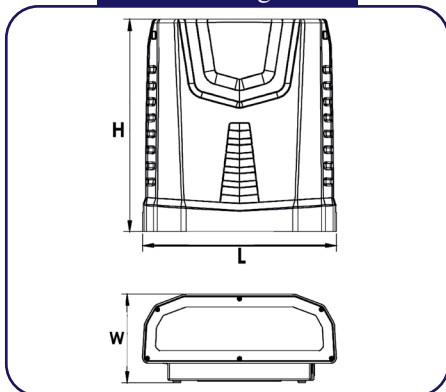

Applications

Outdoor - Entrances, Building walls,
Fences, Door top

Mounting

Wall

THD

< 10

Power Factor

0.95

Housing

Die-cast aluminum

Diffuser

Clear glass

Internal Protection

IP 65

Impact Strength

IK 09

Weight

2.1- 4.3 Kg

Efficacy

125 Lumens / Watt

Working Temp (ta)

55°C

Warranty

5 Years

Life Time

72,000 Hours

CRI

> 80

Certification

SASO 2902



UL Listed



LM79, ISTMT, TM21



Photobiological

Other Options

Emergency Backup - 3 Hr



Dimming 0-10V



Model	Power	Size (H x L x W)	Lumen	Voltage	CCT	Beam Angle
NLC OT-03	30W	207 x 200 x 108 mm	3750 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6000K	120°
	50W		6250 LM			
	70W	285 x 265 x 118 mm	8750 LM			
	80W		10000 LM			
	100W		12500 LM			



Environment friendly product that is free of any hazardous materials