



OT Series

OT-05

Photometric Data

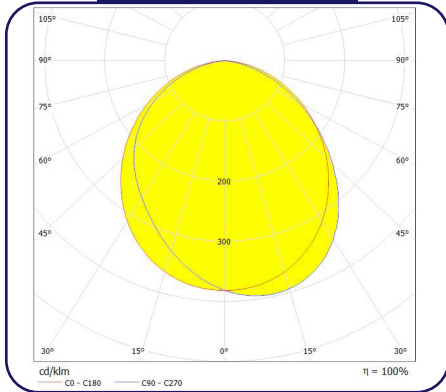

Drawing

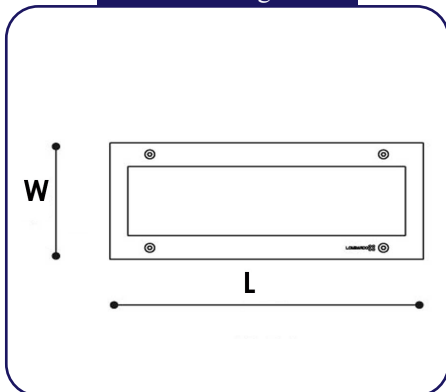

Applications

Outdoor - Staircase, perimeter fence, Pathway lighting, Parks, Gardens, Porch

Mounting

Wall recessed

THD

< 10

Power Factor

0.95

Housing

Polycarbonate base

Diffuser

Tempered glass

Reflector

Aluminium type L2-1060

Internal Protection

IP 66

Impact Strength

IK 09

Weight

1.7 Kg

Efficacy

100 Lumens / Watt

Working Temp (ta)

55°C

Warranty

5 Years

Life Time

50,000 Hours

CRI

> 80

Certification

SASO 2902



UL Listed



Other Options

Dimming 0-10V



Wire Guard

| Model | Power | Size (L x W) | Lumen | Voltage | CCT |
|-----------|-------|--------------|---------|------------------|----------------|
| NLC OT-05 | 6W | 270 x 122 mm | 600 LM | 100-240V/50/60Hz | 3000K |
| | 15W | 335 x 138 mm | 1500 LM | | 4000K 6000K |

