



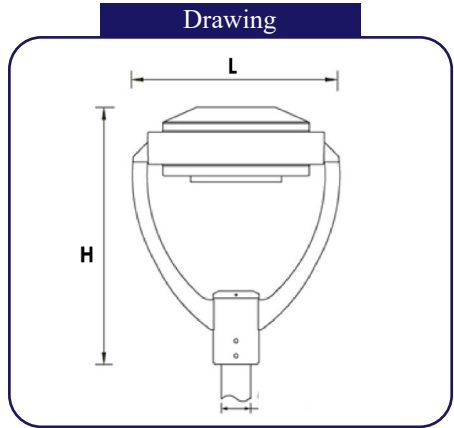

OT Series / **OT-06**

Applications	Outdoor - Commercial premises, Walkways, Park, Gardens, Rural road
Mounting	Pole top
THD	< 10
Power Factor	0.98
Housing	Die cast aluminum
Reflector	Pure anodizing aluminum
Internal Protection	IP 65
Impact Strength	IK 10
Weight	9.2 Kg
Efficacy	110 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	50,000 Hours
CRI	> 80
Certification	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological
Other Options	Dimming 0-10V

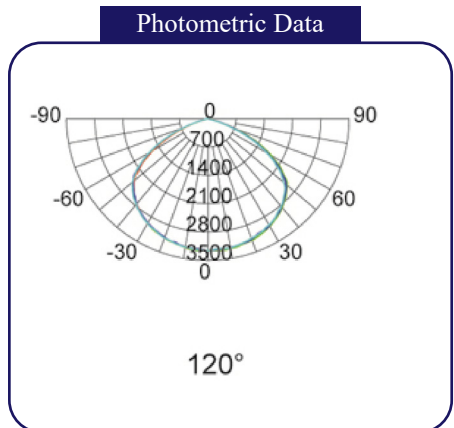

Model	Power	Size (D x H)	Lumen	Voltage	CCT	Beam Angle
NLC OT-06	45W	425 x 545 mm	4950 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	120° 150°
	60W		6600 LM		4000K	
	80W		8800 LM		6000K	

Environment friendly product that is free of any hazardous materials

