

OT Series

OT-07

Applications

Outdoor - Signs, Pathway lighting, Parks, Gardens, Porch

Mounting

Ground

THD

< 10

Power Factor

0.95

Housing

Die cast aluminum

Diffuser

Tempered glass + Lens

Internal Protection

IP 66

Impact Strength

IK 08

Weight

1.5-3Kg

Efficacy

100 Lumens / Watt

Working Temp (ta)

55°C

Warranty

5 Years

Life Time

50,000 Hours

CRI

> 80

Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological




Other Options


Dimming 0-10V

RGB

Photometric Data

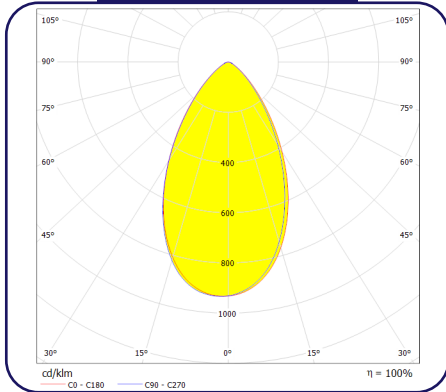

Drawing

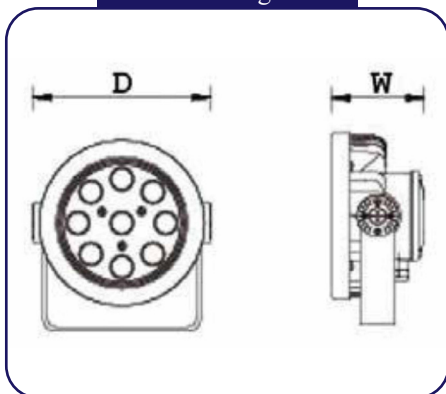

Model	Power	Size (D x W)	Lumen	Voltage	CCT	Beam Angle
NLC OT-07	9W	95 x 120 mm	900 LM	220-240V/50/60Hz	3000K	25°
	12W	130 x 160 mm	1200 LM		4000K	45°
	18W	150 x 160 mm	1800 LM	110-277V/ 50/60Hz	6000K	60°
	30W	180 x 260 mm				90° 120°



Environment friendly product that is free of any hazardous materials