





OT Series

OT-08

Applications	Outdoor - Entrances, Building walls, Fences
Mounting	Wall
THD	< 10
Power Factor	0.95
Housing	Die-cast aluminum
Diffuser	Toughened matt / Clear glass
Internal Protection	IP 66
Impact Strength	IK 08
Weight	5.2 Kg
Efficacy	100 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	50,000 Hours
CRI	> 80
Certification	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological



Other Options	Dimming 0-10V Photocell Single direction (Up or Down) Double direction (Up & Down)
----------------------	---

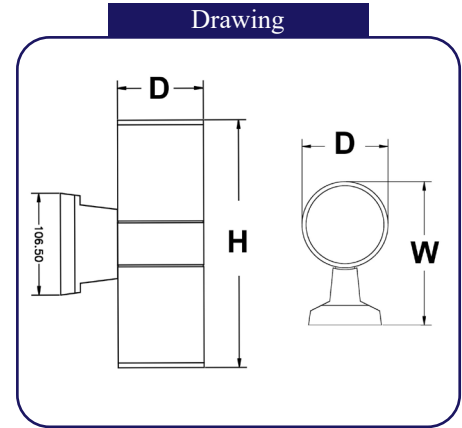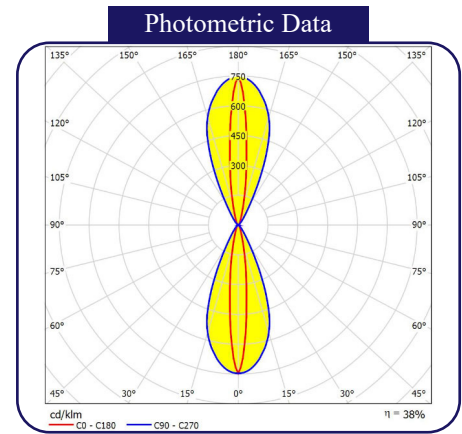

Model	Power	Size (H x W x D)	Lumen	Voltage	CCT	Beam Angle
NLC OT-08	1 x 9W	157 x 150 x 90mm	900 LM	220-240V/60Hz 110-277V/60Hz	3000K	18°
	1 x 18W		1800 LM		4000K	24°
	2 x 9W	259 x 150 x 90mm	2 x 900 LM		6000K	36°
	2 x 18W		2 x 1800LM			

Environment friendly product that is free of any hazardous materials

