






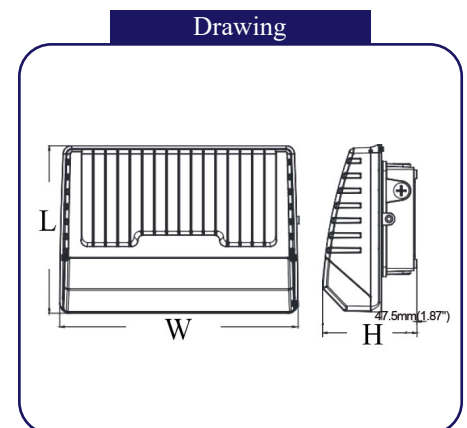
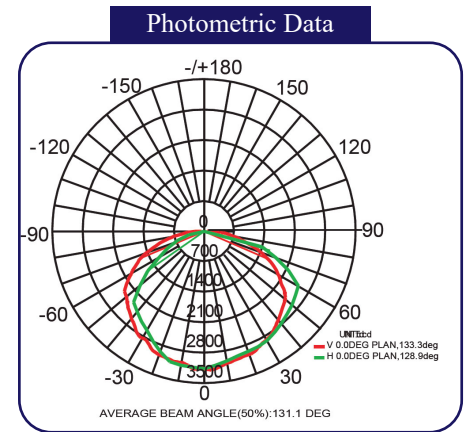




OT Series

OT-10

Applications	Outdoor - Entrances, Building walls, Fences, Door top
Mounting	Wall
THD	< 10
Power Factor	0.95
Housing	Die-cast aluminum
Diffuser	Clear glass
Internal Protection	IP 65
Impact Strength	IK 09
Weight	1.4 - 3.7 Kg
Efficacy	120 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	72,000 Hours
CRI	> 80
Certification	SASO 2902  UL Listed  LM79, ISTMT, TM21  Photobiological  
Other Options	Emergency Backup - 3 Hr  Dimming 0-10V 



Model	Power	Size (H x L x W)	Lumen	Voltage	CCT	Beam Angle
NLC OT-10	30W	216 x 180 x 98 mm	3600 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6000K	120°
	50W		6000 LM			
	70W	319 x 225 x 126 mm	8400 LM			
	80W		9600 LM			
	100W		12000 LM			

Environment friendly product that is free of any hazardous materials

