





PL Series

PL-01

Photometric Data

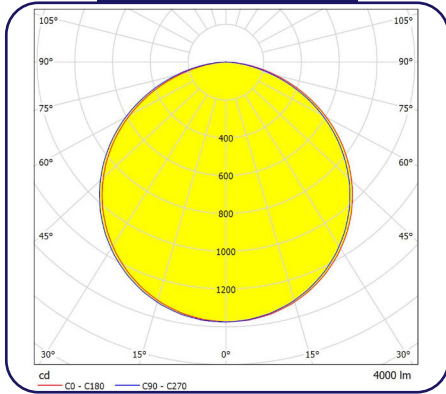

Drawing

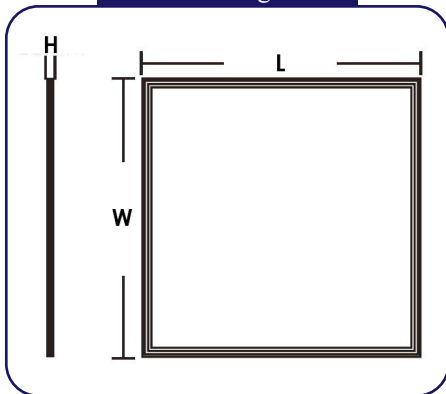

Applications

Indoor - Office, Clinic, Class room, Corridor,
Kitchen, Retail shop

Mounting

Recessed - False Ceiling

THD

< 10

Power Factor

0.95

Housing

Die Cast Aluminum

Diffuser

PMMA

Internal Protection

IP 44

Impact Strength

IK 05

Weight

2.5 - 6 Kg

Efficacy

106 Lumens / Watt

Working Temp (ta)

50°C

Warranty

5 Years

Life Time

50,000 Hours

CRI

> 80

Certification

SASO 2902



UL Listed



LM79, ISTMT, TM21



Photobiological



Other Options

Emergency Backup - 3 Hr

Dimming 0-10V

Dali Interface

IP 54

Surface, Gypsum, Pendant

Gear Box



Model	Power	SIZE (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC PL-01	30W	30 x 120 x 1.1 cm	3180 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6000K	110°
	40W	60 x 60 x 1.1 cm	4240 LM			
	50W	60 x 120 x 1.1 cm	5300 LM			
	60W		6360 LM			
	72W		7632 LM			



Environment friendly product that is free of any hazardous materials