





**PL Series**

**PL-02**

<b>Applications</b>	Indoor - Office, Clinic, Class room, Corridor, Kitchen, Retail shop
<b>Mounting</b>	Recessed - False Ceiling
<b>THD</b>	< 10
<b>Power Factor</b>	0.96
<b>Housing</b>	Iron phosphated steel
<b>Diffuser</b>	PMMA
<b>Internal Protection</b>	IP 44
<b>Impact Strength</b>	IK 05
<b>Weight</b>	5.2 - 8.7 Kg
<b>Efficacy</b>	135 Lumens / Watt
<b>Working Temp (ta)</b>	55°C
<b>Warranty</b>	5 Years
<b>Life Time</b>	72,000 Hours
<b>CRI</b>	> 80
<b>Certification</b>	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological



<b>Other Options</b>	Emergency Backup - 3 Hr Dimming 0-10V Dali Interface IP 65 Surface or Pendant Mounted Flexible Size Air plenum rated Hygenic Locations
----------------------	---

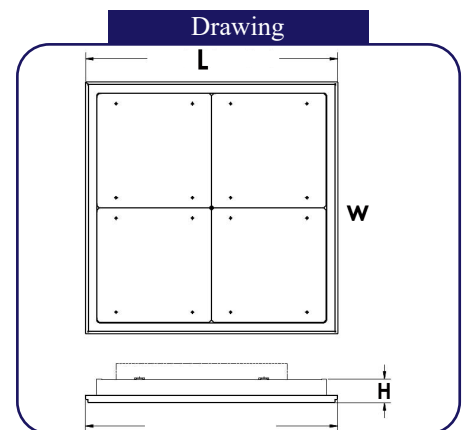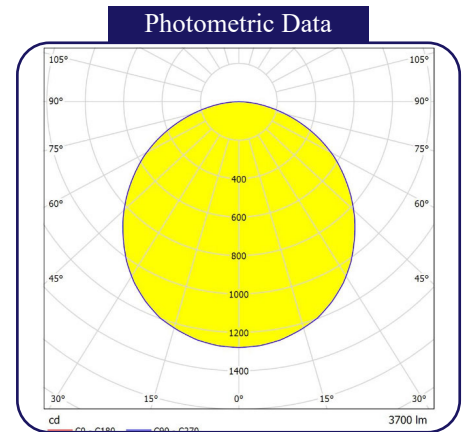

Model	Power	Size(L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC PL-02	30W	30 x 120 x 5.6 cm	4050 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6000K	110°
	45W	60 x 60 x 5.6 cm	6075 LM			
	58W		7830 LM			
	75W	60 x 120 x 5.6 cm	10125 LM			
	90W		12150 LM			

Environment friendly product that is free of any hazardous materials

