





**PL Series**

**PL-03**

**Photometric Data**

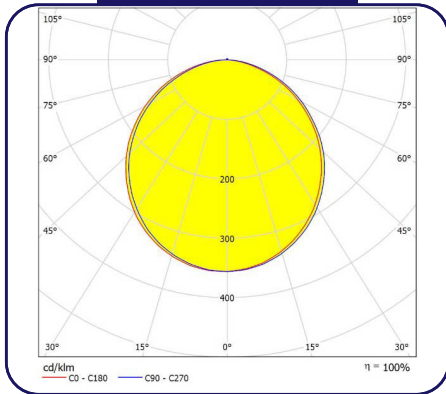

**Drawing**

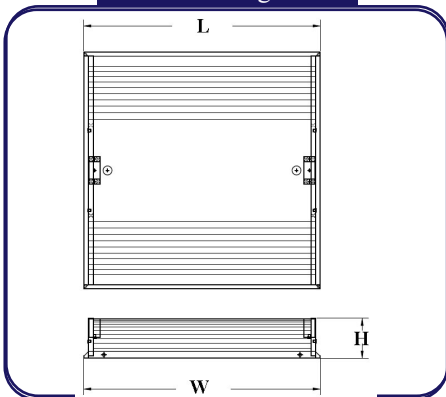

**Applications**

Indoor - Office, Clinic, Class room, Corridor,  
Kitchen, Retail shop

**Mounting**

Recessed - False Ceiling

**THD**

< 10

**Power Factor**

0.96

**Housing**

Iron phosphated steel

**Diffuser**

PMMA

**Internal Protection**

IP 20

**Impact Strength**

IK 05

**Weight**

5.2 - 8.7 Kg

**Efficacy**

110 Lumens / Watt

**Working Temp (ta)**

50°C

**Warranty**

5 Years

**Life Time**

72,000 Hours

**CRI**

> 80

**Certification**

SASO 2902



UL Listed



LM79, ISTMT, TM21



Photobiological

**Other Options**

Emergency Backup - 3 Hr



Dimming 0-10V



Dali Interface



Flexible Size



Model	Power	Size(L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC PL-03	40W	60 x 60 x 10 cm	4400 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	110°
	60W		6600 LM		4000K	
	80W	60 x 120 x 10 cm	8800 LM		6000K	



Environment friendly product that is free of any hazardous materials