



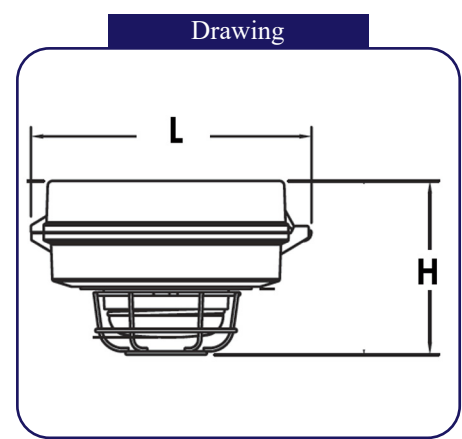

EX Series / **SAF J**

Applications	Parking lots, Warehouses, Factories, Mining/Heavy industry, Sporting Complexes, Retails, Exhibition halls
Mounting	Pendant / Ceiling / Wall / Stanchion
THD	< 10
Power Factor	0.95
Housing	Aluminium with epoxy finish
Diffuser	Borosilicate glass
Internal Protection	IP 66
Impact Strength	IK 10
Efficacy	100 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	70,000 Hours
CRI	> 80
Certification	SASO 2902 LM79, ISTMT, TM21 Photobiological NEMA 4X UL Listed UL 1598A Marine Outside Type UL 1598 Wet Locations UL 844 Hazardous Locations UL 8750 LED Safety Class I, Division 2, Groups A, B, C, & D - T2 Class II, Division 1 & 2, Groups E, F & G - T3A Class III ABS Type Approved
Other Options	Dimming 0-10V Dali Interface Globe & Guard

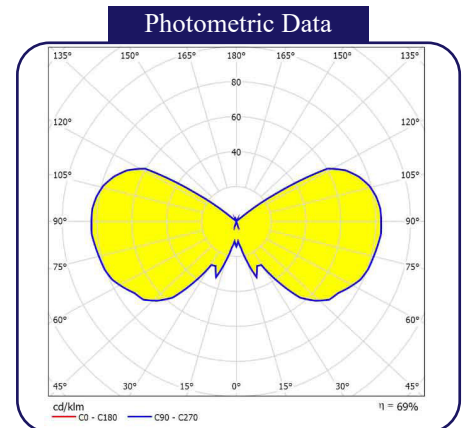

Model	Power	Size (L x H)	Lumen	Voltage	CCT	Mounting
NLC SAFJ	03=30W	296 x 178 mm	3050 LM	U = 120-277V/60Hz N = 347/480V/60Hz	3000K	P = ¾" Pendant Mount P1 = 1" Pendant Mount C = ¾" Ceiling Mount C1 = 1" Ceiling Mount W = ¾" Wall Mount W1 = 1" Wall Mount S = 1-¼" 25° Stanchion Mount S1 = 1-½" 25° Stanchion Mount L = 1-¼" 90° Stanchion Mount L1 = 1-½" 90° Stanchion Mount
	06=50W		4800 LM		4000K	
				6000K		

Environment friendly product that is free of any hazardous materials

