





**SM Series** / **SM-08**

<b>Applications</b>	Indoor / Outdoor - Corridor, Kitchen, Retail shop, Stair case, Canopy, Bulkhead
<b>Mounting</b>	Surface
<b>THD</b>	< 10
<b>Power Factor</b>	0.95
<b>Housing</b>	Die cast aluminum
<b>Diffuser</b>	PMMA Opal
<b>Internal Protection</b>	IP 65
<b>Impact Strength</b>	IK 06
<b>Weight</b>	1.4 Kg
<b>Efficacy</b>	105 Lumens / Watt
<b>WorkingTemp (ta)</b>	55°C
<b>Warranty</b>	5 Years
<b>Life Time</b>	72,000 Hours
<b>CRI</b>	> 80
<b>Certification</b>	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological



<b>Other Options</b>	Emergency Backup - 3 Hr Dimming 0-10V Dali Interface Wall Mounted Wire Guard
----------------------	--

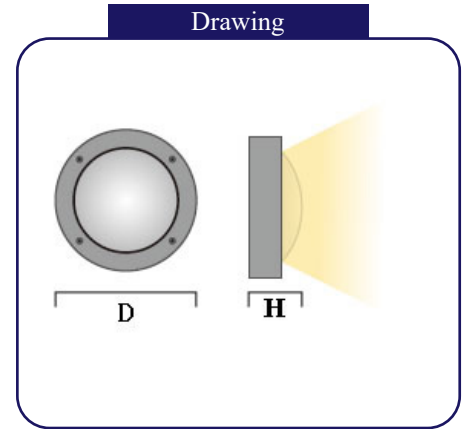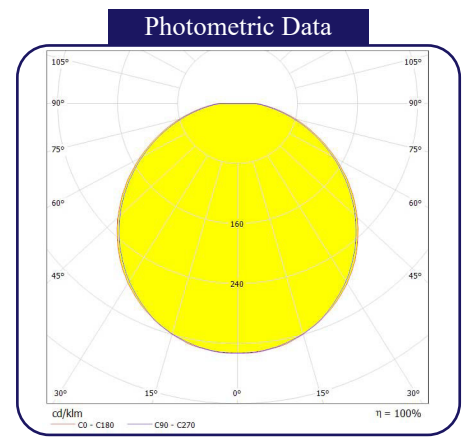

Model	Power	Size (D x H)	Lumen	Voltage	CCT	Beam Angle
NLC SM-08	15W	280 x 102 mm	1575 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	120°
	22W		2310 LM		4000K	
	30W		3150 LM		6000K	

Environment friendly product that is free of any hazardous materials

