


SM Series

SM-09

Photometric Data

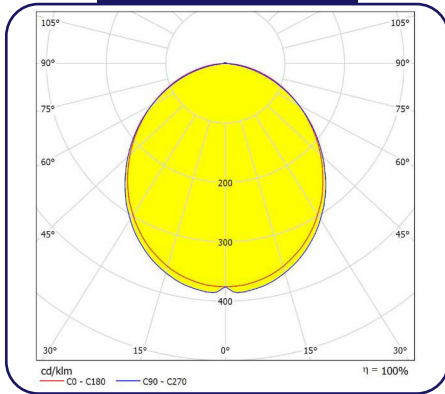

Drawing



Accessories

2Wires rail



3Wires rail



Straight connector



L connector



T connector



“+” connector



End connector



Applications

Indoor - Exhibitions, Concerts, School stages,
Fashion show, Showroom, Architectural

Mounting

Surface

THD

< 10

Power Factor

0.95

Housing

Die-cast aluminum

Diffuser

PMMA

Internal Protection

IP 20

Impact Strength

IK 04

Weight

1.2 - 2.7 Kg

Efficacy

85 Lumens / Watt

Working Temp (ta)

60°C

Warranty

5 Years

Life Time

50,000 Hours

CRI

> 80

Certification

SASO 2902



UL Listed



LM79, ISTMT, TM21

Photobiological



Other Options

Emergency Backup - 3 Hr



Dimming 0-10V



Dali Interface



2Wires / 3Wires / 4Wires

Model	Power	Size (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC SM-09	10W	10 x 60 x 165 mm	850 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	12°
	20W	115 x 70 x 170 mm	1700 LM		4000K	24°
	30W	125 x 80 x 190 mm	2550 LM		6500K	36°
	40W	135 x 90 x 190 mm	3400 LM			



Environment friendly product that is free of any hazardous materials