





SM Series / **SM-02**

Applications Indoor - Office, Clinic, Class room, Corridor, Kitchen, Retail shop, Stair case

Mounting	Surface
THD	< 10
Power Factor	0.95
Housing	Die-cast aluminum
Diffuser	PMMA
Internal Protection	IP 20
Impact Strength	IK 04
Weight	0.6 - 1.1 Kg
Efficacy	100 Lumens / Watt
Working Temp (ta)	50°C
Warranty	5 Years
Life Time	50,000 Hours
CRI	> 80
Certification	SASO 2902 LM79, ISTMT, TM21 Photobiological



Other Options Emergency Backup - 3 Hr
Dimming 0-10V
Dali Interface
Square shape

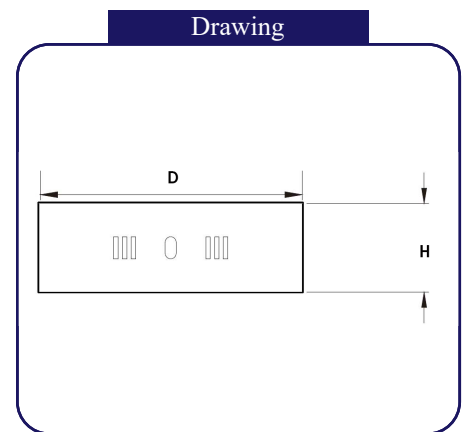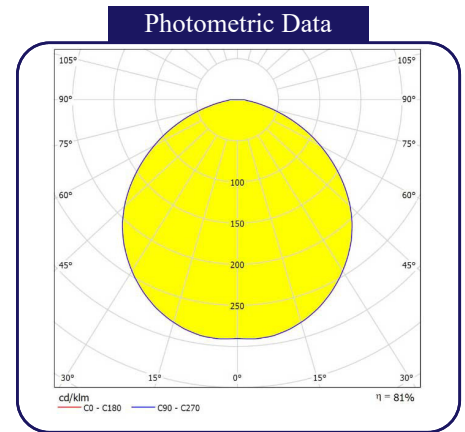

Model	Power	Size (D x H)	Lumen	Voltage	CCT	Beam Angle
NLC SM-02	12W	Φ120 x 40 mm	1200 LM	220-240V/50/60Hz	3000K	120°
	20W	Φ170 x 40 mm	2000 LM		4000K	
	25W	Φ220 x 40 mm	2500 LM	110-277V/ 50/60Hz	6000K	
	30W	Φ300 x 40 mm	3000 LM		125VDC	

Environment friendly product that is free of any hazardous materials

