



## SM Series

## SM-05


### Photometric Data

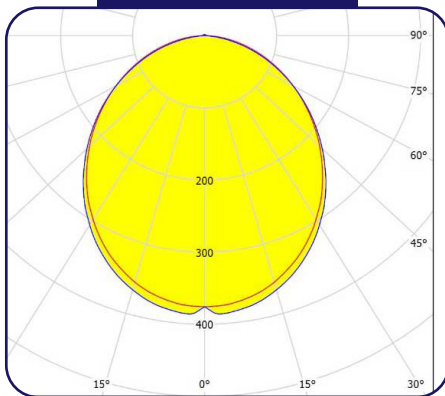

### Surface Drawing

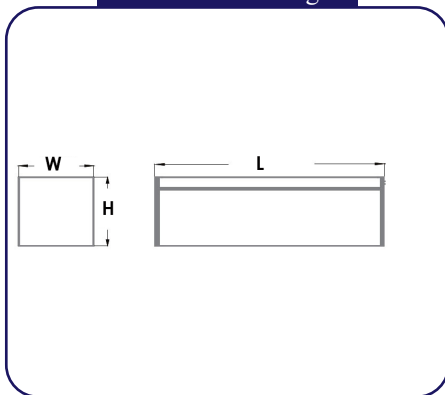

### Recessed Drawing

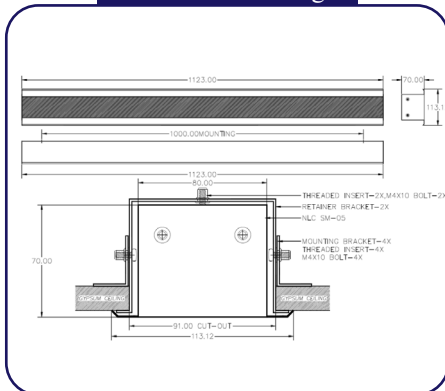

### Applications

Indoor - Office, Clinic, Class room, Corridor,  
Kitchen, Retail shop

### Mounting

Surface

### THD

< 10

### Power Factor

0.95

### Housing

Iron phosphated steel

### Diffuser

PMMA

### Internal Protection

IP 44

### Impact Strength

IK 06

### Weight

1.8 - 3.9 Kg

### Efficacy

110 Lumens / Watt

### Working Temp (ta)

50°C

### Warranty

5 Years

### Life Time

72,000 Hours

### CRI

> 80

### Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



### Other Options

Emergency Backup - 3 Hr

Dimming 0-10V

Dali Interface

Pendant Mounted

Flexible Size

IP 65

Continuous Linear (Different Size-Contact Sales)

Recessed Mounted (Different Size-Contact Sales)

Mounting Rope



| Model     | Power | Size (L x W x H)  | Lumen   | Voltage                               | CCT   | Beam Angle |
|-----------|-------|-------------------|---------|---------------------------------------|-------|------------|
| NLC SM-05 | 15W   | 564 x 80 x 70 mm  | 1650 LM | 220-240V/50/60Hz<br>110-277V/ 50/60Hz | 3000K | 120°       |
|           | 30W   | 1131 x 80 x 70 mm | 3300 LM |                                       | 4000K |            |
|           | 40W   | 1686 x 80 x 70 mm | 4400 LM |                                       | 6500K |            |
|           | 50W   | 2246 x 80 x 70 mm | 5500 LM |                                       |       |            |

