





FL Series

T150

Photometric Data

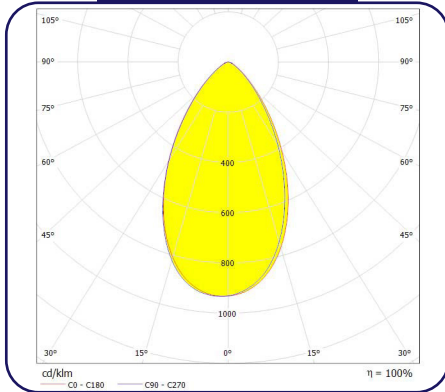

Drawing

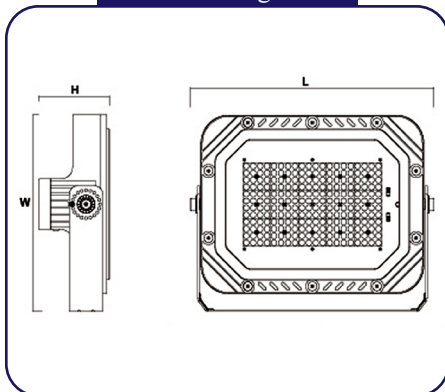

Applications	Outdoor - Areas, Farms, Building Washers, Parking Area
Mounting	Trunion - Ground / Pole / Wall
THD	< 10
Power Factor	0.95
Housing	Die-casting Aluminum.
Diffuser	Tempered glass
Internal Protection	IP 65
Impact Strength	IK 08
Weight	5 - 8.6 Kg
Efficacy	130 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	72,000 Hours
CRI	> 80
Certification	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological
Other Options	Dimming 0-10V



Model	Power	Size(L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC T150	60W	303 x 246 x 93 mm	7800 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	4000K 5700K	60° 75x135°
	80W		10400 LM			
	100W	385 x 309 x 110 mm	13000 LM			
	150W		19500 LM			
	200W		26000 LM			



Environment friendly product that is free of any hazardous materials