





**EX Series**

**XML**

**Photometric Data**

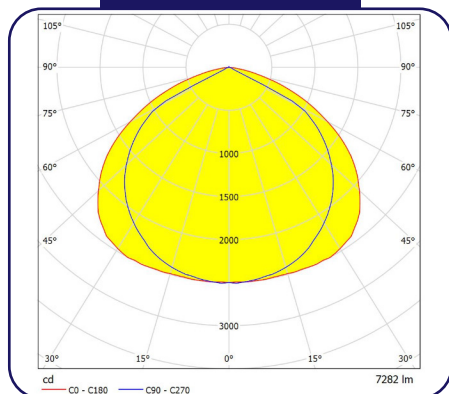

**Drawing**

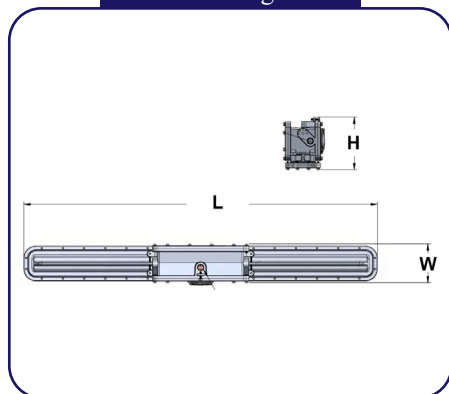

**Applications**

Parking lots, Warehouses, Factories, Mining/Heavy industry, Sporting Complexes, Retails, Exhibition halls

**Mounting**

Ceiling

**THD**

< 10

**Power Factor**

0.95

**Housing**

Aluminium with epoxy finish

**Diffuser**

Tempered glass

**Internal Protection**

IP 66

**Impact Strength**

IK 10

**Efficacy**

100 Lumens / Watt

**Working Temp (ta)**

-40°C to 65°C

**Warranty**

5 Years

**Life Time**

70,000 Hours

**CRI**

> 80

**Certification**

SASO 2902  
 LM79, ISTMT, TM21  
 Photobiological  
 NEMA 4X  
 UL Listed  
 UL 1598A Marine Outside Type  
 UL 1598 Wet Locations  
 UL 8750 LED Safety  
 UL 844 Hazardous Locations  
 UL 924 Emergency Lighting  
 Class I, Division 1, Groups C & D - T6  
 Class I, Division 2, Groups C & D - T4A  
 Class II, Division 1, Groups E, F & G - T6  
 Class III  
 ABS Type Approved



**Other Options**

Emergency Backup - 3 Hr

Dimming 0-10V

Dali Interface



Model	Power	Size (L x W x H)	Lumen	Voltage	CCT	Beam Angle
NLC XML	04=30W	2= Two Foot 609 x 134 x 182 mm	3000 LM	U =120-277V/60Hz	3000K	120°
	05=38W		3800 LM			
	06=45W	4= Four Foot 1219 x 134 x 182 mm	4500 LM	N =347/480V/60Hz	4000K	
	07=54W		5400 LM		B =220 -240V/60 Hz	
	09=75W		7500 LM			
	14=90W		9000 LM			



Environment friendly product that is free of any hazardous materials